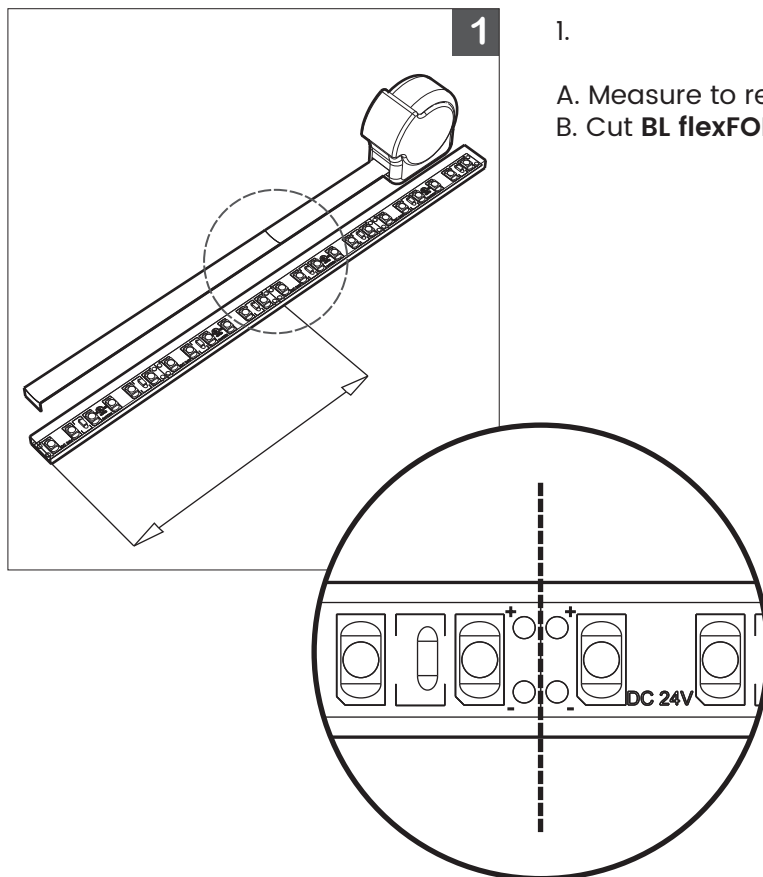# BL flexFORM
Flexible, Linear LED Strip Lighting
Monochromatic, 24VDC, Constant Voltage

D3 Series

Printed

1

1.

A. Measure to required length of **BL flexFORM D3**.
B. Cut **BL flexFORM D3**.

IMPORTANT: Only cut at designated markings on PCB.

PROJECT

CLIENT

TYPE

For more information, please download the
BL LIGHTING catalogue
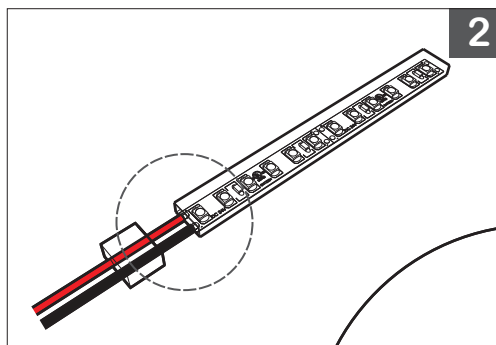
bllighting.com

![BL LIGHTING SINCE 1986]

BL flexFORM
Flexible, Linear LED Strip Lighting
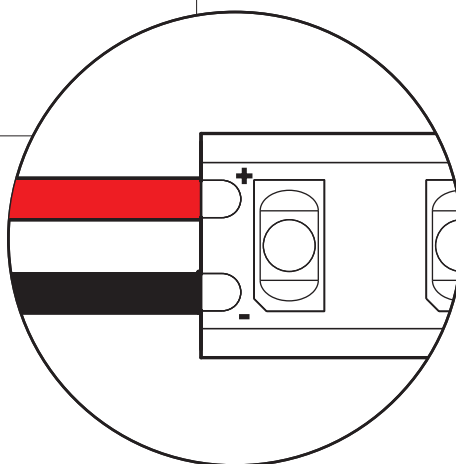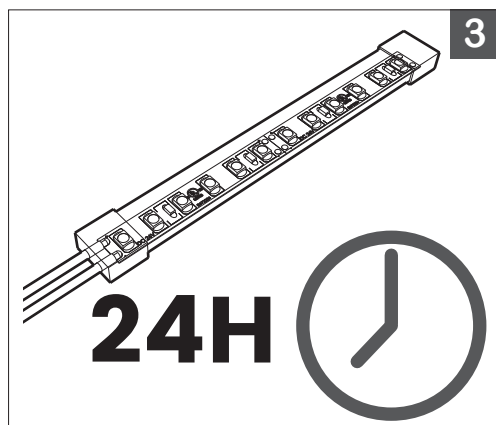Monochromatic, 24VDC, Constant Voltage

D3 Series

Printed

2.

A. Insert Red (+) and Black (–) conductors through End Cap.
B. Solder conductors directly onto PCB at assigned location.

IMPORTANT: Ensure polarity is correct before applying solder.

Confirm and test **BL flexFORM D3** connections are working correctly with power supply before proceeding to Step 3.

3.

A. Fill End Caps with RTV sealant. Install onto **BL flexFORM D3**.
B. Allow sealant to cure (24 hours) before installation.

24H

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

bllighting.com