



Please note that these instructions are guidelines only and in no way supersede any construction or installation standards.
Local building and electrical codes should be consulted before installation.

ATTENTION


- There is potential danger of electrical shock when operating electrical components.
- Make sure power is turned off before installation.
- Allow for heat dissipation and adequate ventilation.

RECOMMENDED INSTALLATION TOOLS

- Hex Key
- Zinc-plated AISI 1215 carbon steel or 316/316L stainless steel M6 mounting screws (10–20 mm long)


NOTE:

1. The items mentioned above are suggested for installation purposes and are not included by BL Lighting.
2. Make sure the screws are constructed from robust materials like **Color-plated Zinc Carbon Steel 1215** or **Stainless Steel 316/316L** to prevent rust and guarantee durability.
3. The hex key must correspond to the size of the hex-socket bolt for smooth adjustment of the fixture's rotation.
4. Select an appropriate fastener according to the mounting surface to ensure a stable and secure setup.

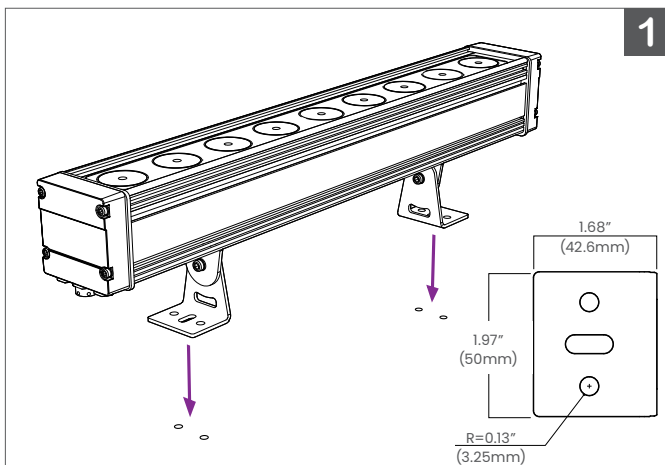

1.

Position the **LN1171** Series fixture at the desired mounting location.

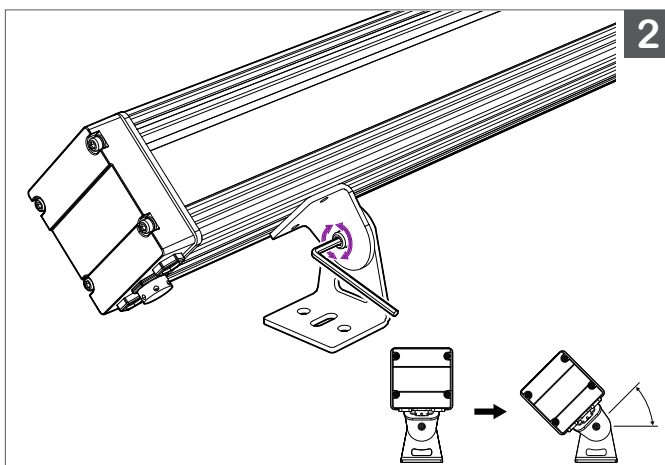

2.

- A. Loosen the hex-socket bolt with a hex key to access the mounting bracket.
- B. After extending the mounting bracket, lightly tighten the hex-socket bolt to hold the bracket in position before proceeding to the next step.



3

3.

Fasten mounting bracket with bolts through mounting holes.

4

4.

Repeat **Step 2** and **Step 3** on the other side.

5

5.

Tilt **LN1171 Series** at desired angle.
Re-tighten with Hex Key.

Installation complete.

