




Please note that these instructions are guidelines only and in no way supersede any construction or installation standards.
Local building and electrical codes should be consulted before installation.

ATTENTION

- There is potential danger of electrical shock when operating electrical components.
- Make sure power is turned off before installation.
- Allow for heat dissipation and adequate ventilation.

Component Description

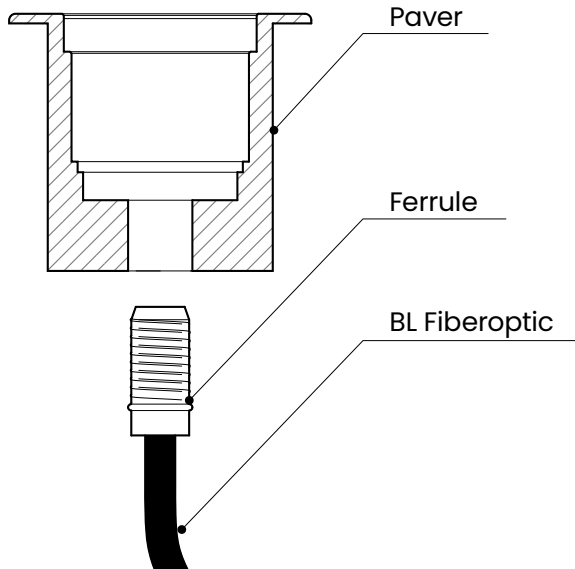


This installation guide is for the following models:

P10, P11, P12, P13, P16, P18, P20, P22, P23, P24, P27, P28, P29, P30, P31

Note: This guide is indicative only. Installation of these fittings is dependent on the surface they are being installed in and local environmental conditions.


Hole Cutout Sizes

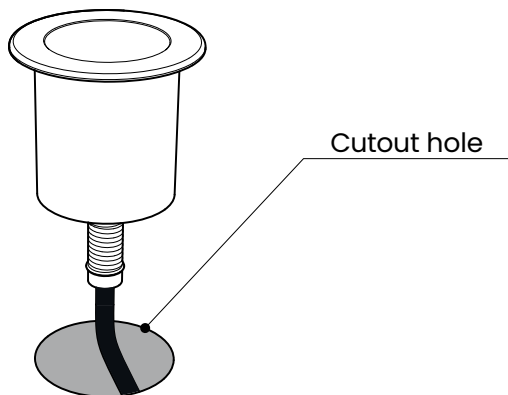

Hole Cutout Sizes

P10	Ø1.50" (38 mm)
P11	Ø1.06" (27 mm)
P12	Ø1.10" (28 mm)
P13	Ø0.51" (13 mm)
P16	Ø2.84" (72 mm)
P18	Ø0.59" (15 mm)
P20	Ø1.89" (48 mm)
P22	Ø1.10" (28 mm)
P23	Ø1.50" (38 mm)
P24	Ø2.01" (51 mm)
P27	Ø2.24" (54 mm)
P28	Ø1.50" (38 mm)
P29	Ø1.50" (38 mm)
P30	Ø0.75" (19 mm)
P31	Ø0.87" (22 mm)




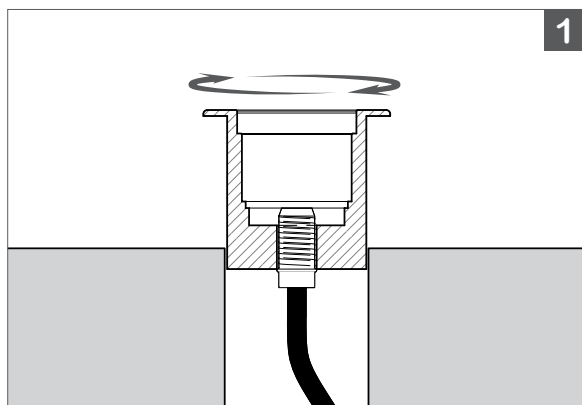

1.


Insert the BL Fiberoptic through the cutout hole. Hold the ferrule, then screw it clockwise into the opening on the underside of the paver.

NOTE: Paver fittings with adjustable lenses are focusable. The further the ferrule is screwed into the fitting, the wider the output light beam will be.

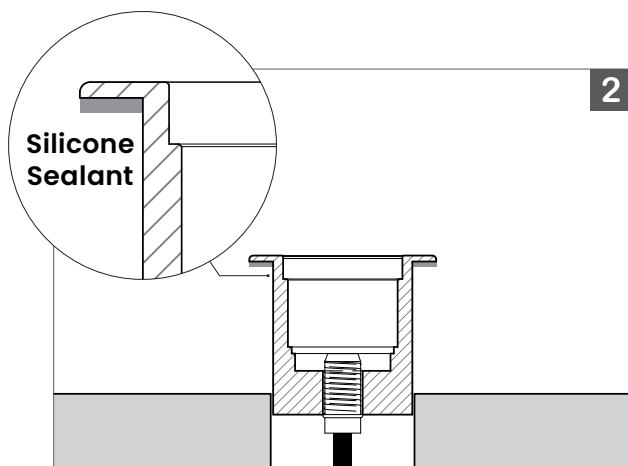

2.

Apply a bead of silicone sealant to the underside of the paver lip to provide adhesion to the mounting surface.

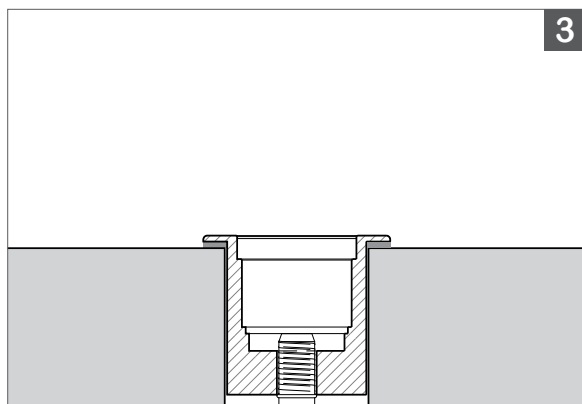

3.

Place the paver into the cutout hole and allow the silicone sealant to dry according to the product instructions.

