

BL fiberSOURCE

LED Light Engine Designed for BL fiberOPTIC
12W, Polychromatic, DMX512, 12VDC

LV2

Printed



Certification



Lighting



Lamp	LED, Dual Port, 6W (x2)
Average Life	50,000 Hours
Lumens	300 lm
Efficacy	25 lm/w

Electrical

Input Voltage	12VDC
Load	12W
Operating Temperature	-4°F to 104°F (-20°C to 40°C)
Cord Length	39.4" (1 m)

Mechanical

Housing Construction	Aluminium Alloy, Plastic Port
Aperture	1/2" (13mm)
Weight	1.17lb (530g)
Environmental	IP20
Control	RF Remote, Dip Switches
Connections	XLR 3Pin DMX IN/OUT

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




BL fiberSOURCE

LED light engine designed for **BL fiberOPTIC**
12W, Polychromatic, DMX512, 12VDC

LV2

Printed

Dimensions

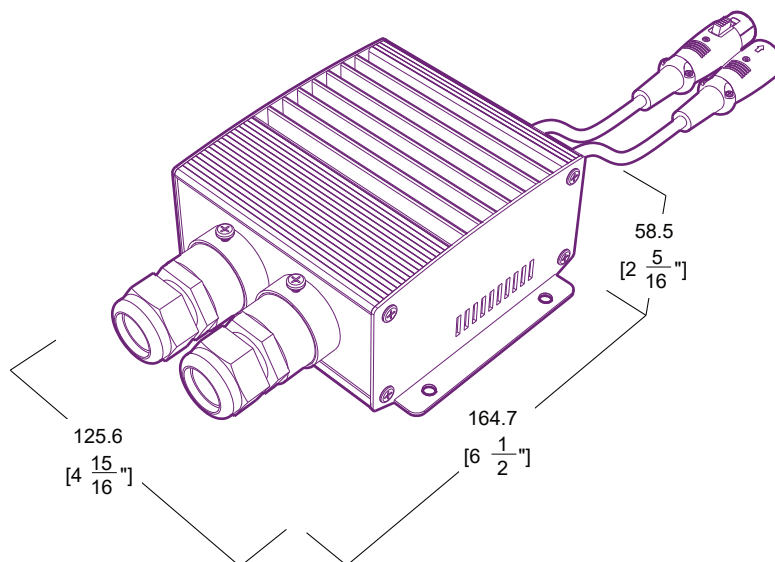

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

