
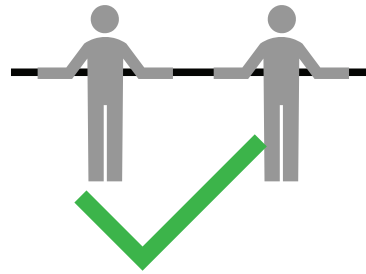


BL neonVIEW SI Series Installation Guide

For lengths exceeding 6ft, one person is required to mount the BL neonVIEW SI into the track or clips, and a second person to support the length of LED during installation. Do not bend the luminaire past the minimum diameter, and do not twist or bend in the opposite direction of its specified bending direction to avoid damage to the internal circuit board.



A

Measure BL neonVIEW Aluminum Mounting Channel and Clips to required length, cut and place for accurate coupling with BL neonVIEW SI Series. For Mounting Clips, a minimum of 2 per foot is recommended.

Surface mount with screws or fasteners into through holes. Ensure mounting surface and Channel or Clips are clean and clear of debris.

B


Place a small dab of adhesive (0.025ml) on inside ridge at 6" intervals along the Mounting Channels and repeat process on diagonal side. For Mounting Clips place 2 dabs per clip in kitty corner position.



BL neonVIEW SI Series Installation Guide

C

Installation angle must not exceed **15°** when inserting BL neonVIEW into the channel to avoid damage to the internal circuit board. For lengths exceeding 6ft, a 2nd qualified installer is recommended to support the lighting at an appropriate angle during installation.

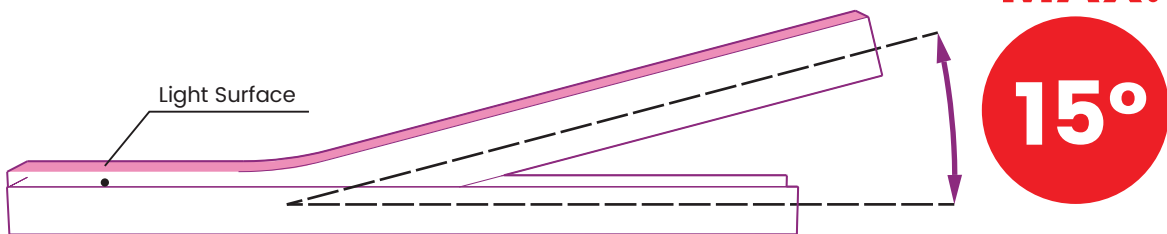

D

Press gently to securely seat BL neonVIEW SI Series into Channel or Clips.

IMPORTANT

Place adhesive and BL neonVIEW SI Series into Channel or Clip one at a time, before continuing onto the next segment as the adhesive dries quickly.

