

BL fiberSOURCE

LED Light Engine Designed for **BL fiberOPTIC**
22W, Mono or Polychromatic

LV4 Series


Printed



Certification



Lighting



Load	22W
Average Life	50,000 Hours
Lumens	1980 lm (6500K)
Efficacy	90 lm/W (6500K)

Electrical

Controls	DMX, 0-10V, IR Remote
Input Voltage	24VDC
Connections	2 x XLR 3 Pin, Female Barrel Plug
Operating Temperature	14°F to 104°F (-10°C to 40°C)

Mechanical

Aperture	1.2" (30mm)
Weight	2.1 lbs (0.95kg)
Environmental	IP20
Power Cord Length	6' (1.8m)

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com



BL fiberSOURCE

LED Light Engine Designed for **BL fiberOPTIC**
22W, Mono or Polychromatic

LV4 Series

Printed


Performance

CCT/Color	Load	Lumens	Efficacy
3000K	22 W/Unit	1580 lm	72 lm/W
4000K	22 W/Unit	1700 lm	77 lm/W
5000K	22 W/Unit	1700 lm	77 lm/W
6500K	22 W/Unit	1980 lm	90 lm/W
RGB	22 W/Unit	880 lm	40 lm/W

Ordering

Series	CCT/Color	Control
BL fiberSOURCE LV4	<input type="text"/> 30 = 3000K 40 = 4000K 50 = 5000K 65 = 6500K MI = RGB	<input type="text"/> NO = Non-Dimming TW = Twinkle Wheel 10V = 0-10V DMX = DMX

Dimensions

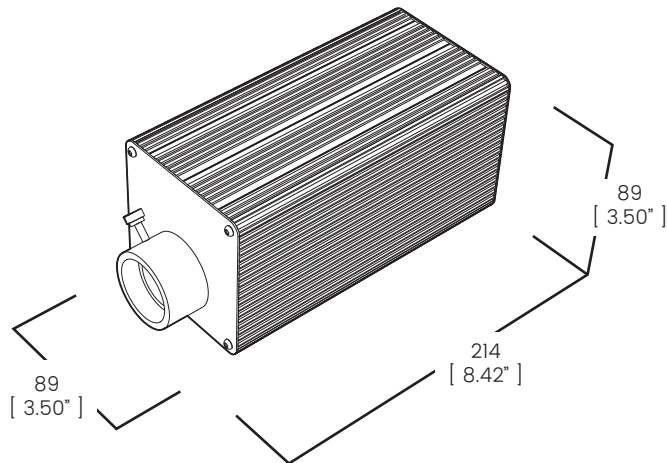

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

