

BL driveLINE SP Series

Surge Protector for Line Voltage LED Luminaires
100 - 125VAC, Plug-in Receptacle

PWR

Printed



Certification



Electrical

Input Voltage	100V - 125VAC
Max. Line Power	1875W
Max. Current	15A
Protection	Type 3 SPD
Surge Current Rating	30,000A, 8/20 μSec Wave
Rating (2mS)	600 Joules
Max. Clamping Voltage	500V

Mechanical

Housing Construction	Plastic, Ivory White
Environmental	IP20
Weight	126g (4.4oz)

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada, V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




BL driveLINE SP Series

Surge Protector for Line Voltage LED Luminaires
100 - 125VAC, Plug-in Receptacle

PWR

Printed

Dimensions

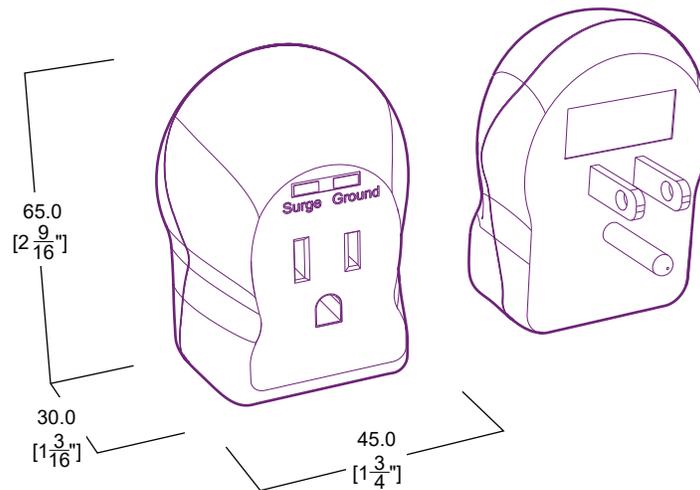

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada, V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

