

BL flexFORM

Flexible, Linear LED Strip Lighting
Monochromatic, Line Voltage

LINE D1 Series

Printed



Please note that these instructions are guidelines only and in no way supersede any construction or installation standards.


ATTENTION

- There is potential danger of electrical shock when operating electrical components.
- Make sure power is turned off before installation.
- Allow for heat dissipation and adequate ventilation.

Local building and electrical codes should be consulted before installation.


CLIP

Ideal for wood and other porous surfaces

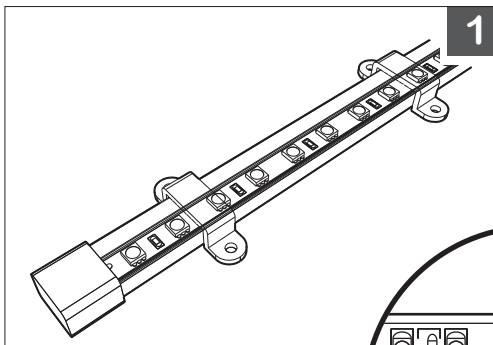


1.

- A. Hold **BL flexFORM LINE D1 Series** taut to mounting surface.
- B. Align clips in-between LED diodes (not directly over them).

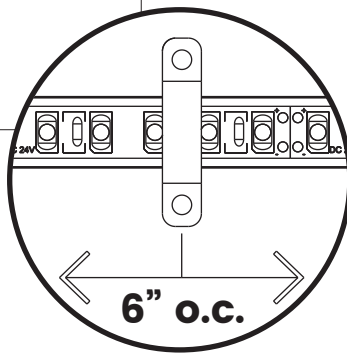

NOTE: Two clips per linear foot is recommended for secure fastening.

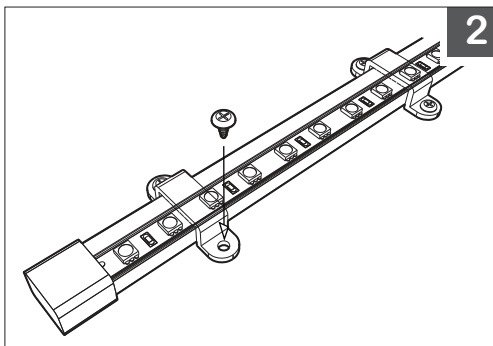

2. Mount clips to surface with screws.

IMPORTANT: Be careful not to over-tighten screws when using power tools.

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the **BL LIGHTING** catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com



BL flexFORM

Flexible, Linear LED Strip Lighting
Monochromatic, Line Voltage

LINE D1 Series

Printed



Please note that these instructions are guidelines only and in no way supersede any construction or installation standards.


ATTENTION

- There is potential danger of electrical shock when operating electrical components.
- Make sure power is turned off before installation.
- Allow for heat dissipation and adequate ventilation.

Local building and electrical codes should be consulted before installation.

PVC TRACK


Ideal for smooth and/or delicate surfaces

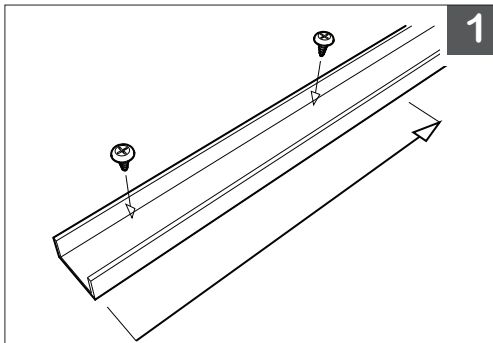

1.

- A. Measure PVC Track to required length and cut for accurate coupling with **BL flexFORM LINE D1 Series**.
- B. Surface mount PVC Track with screws.

IMPORTANT: Ensure mounting surface is clean and clear of debris.

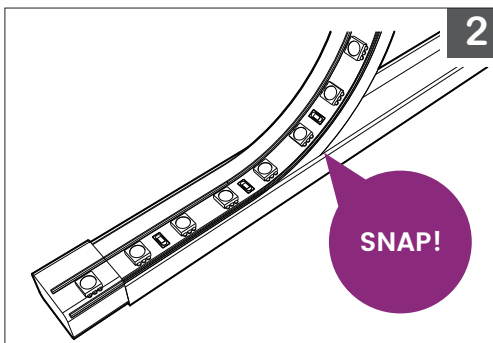

- 2. Push **BL flexFORM LINE D1 Series** into PVC Track for snug and secure fit.

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the **BL LIGHTING** catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

