


**BL neonVIEW**

Diffused, Flexible, Linear LED Lighting  
Dome Profile, 24VDC, Constant Voltage

**DM Series**


Printed

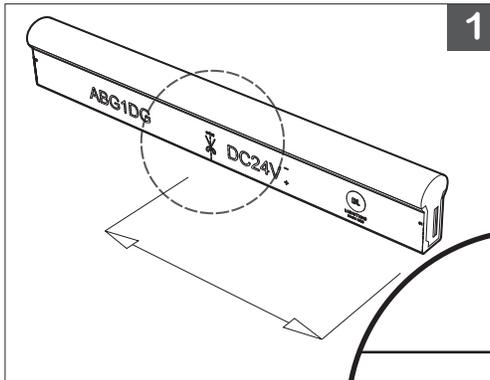


**1**

1.

- A. Measure **BL neonVIEW DM** to required length.
- B. Cut **BL neonVIEW DM**.

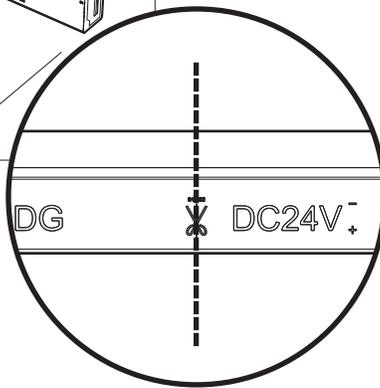


**IMPORTANT:** Only cut at designated markings on **BL neonVIEW DM**.

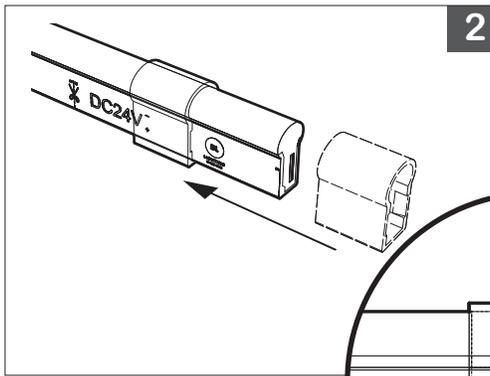

**2**

- 2. Install clear cover over **BL neonVIEW DM**.

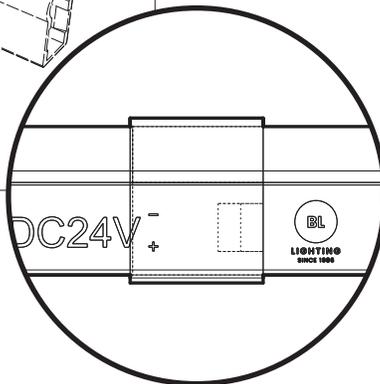

**IMPORTANT:** Ensure clear cover orientation is correct before proceeding to Step 3.

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

**bllighting.com**




**BL neonVIEW**

Diffused, Flexible, Linear LED Lighting  
Dome Profile, 24VDC, Constant Voltage

**DM Series**


Printed

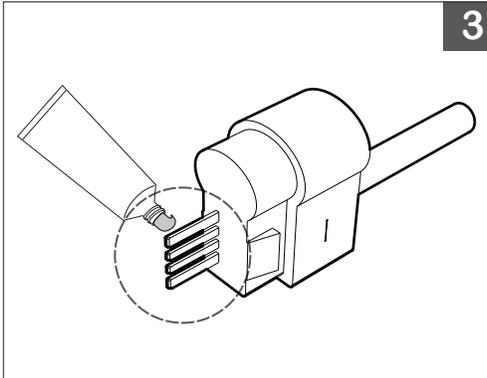

**3**


3.

- A. Use an anti-oxidation compound directly on power connector pins.
- B. Liberally apply RTV silicone sealant to power connector.

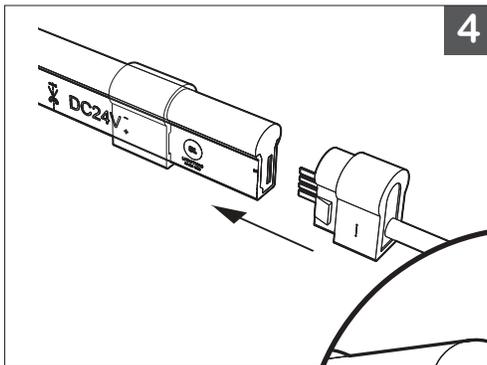

**4**

4. Fully insert power connector pins into **BL neonVIEW DM**.

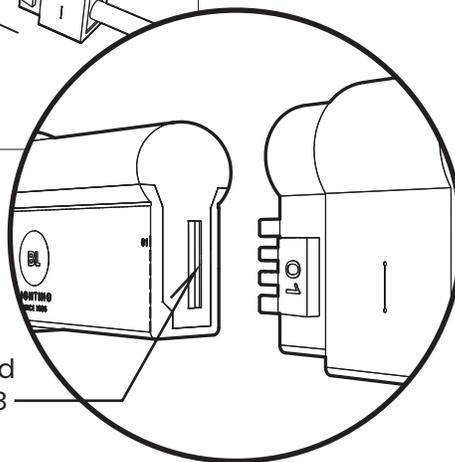

**TIP:** Copper located on right side of PCB

**IMPORTANT:** Make sure the power connector pins make proper contact with the copper side of the PCB inside **BL neonVIEW DM**.

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the **BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

[bllighting.com](http://bllighting.com)




**BL neonVIEW**

Diffused, Flexible, Linear LED Lighting  
Dome Profile, 24VDC, Constant Voltage

**DM Series**


Printed

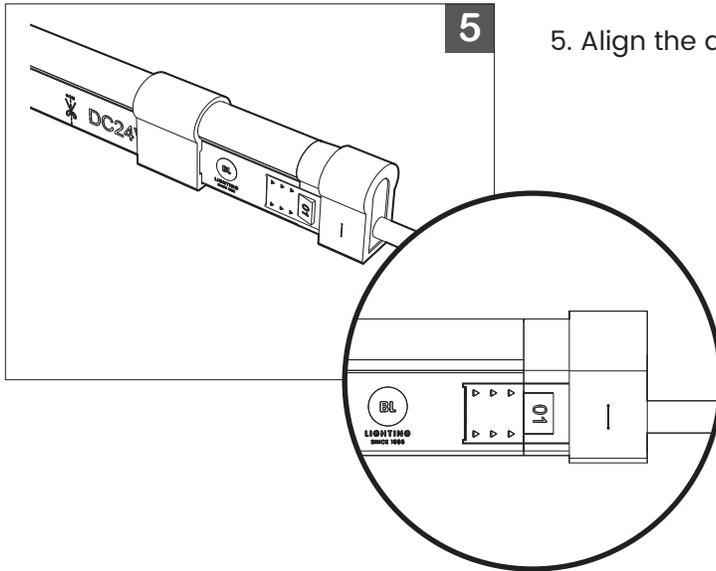

5

5. Align the anti-skid clips onto the power connector.

**IMPORTANT:** Be certain the anti-skid clips are installed firmly and in the correct positioning.

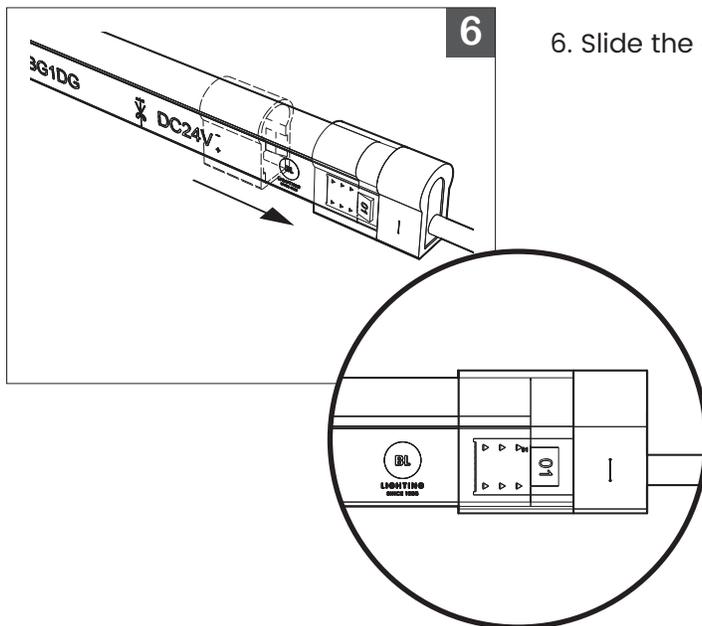

6

6. Slide the clear cover over the anti-skid clips.

**IMPORTANT:** The clear cover should be positioned flush to the power connector.

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada, V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

**bllighting.com**




**BL neonVIEW**

Diffused, Flexible, Linear LED Lighting  
Dome Profile, 24VDC, Constant Voltage


**DM Series**

Printed

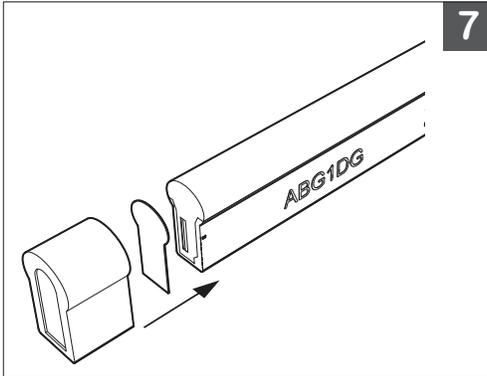

7.

- A. Fit the shade sheet into the **BL neonVIEW DM** end cap.
- B. Fill the end cap with RTV silicone sealant and install onto the **BL neonVIEW DM**.

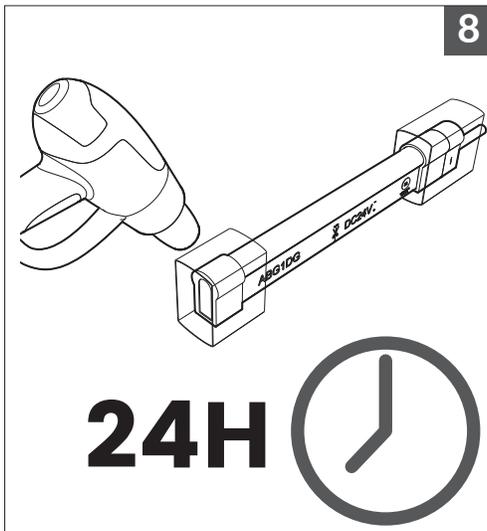

8.

- A. Use heat shrink on the power connector and end cap.
- B. Allow sealant to cure (24 hours) before installation.

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

**bllighting.com**

