


## BL CBOX SDR

Fully Assembled Control + Power Boxes  
Single Circuit, 10W, 24VDC, CV, Non-Dimmable

## HT10AS

Printed

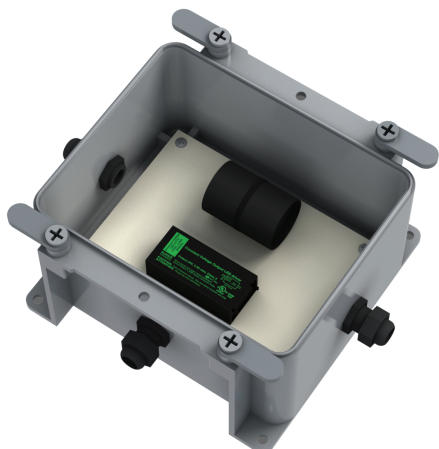

## Certification



## Electrical

Input Voltage	100V - 120VAC
Input Frequency	60 Hz
Max Input Current	2A
Output Voltage	24VDC, 0.48A, Constant Voltage
Load	10W
Connections	18 AWG, Copper Conductors
Min Load	20% - 25%
Power Factor	0.9
Operating Temperature	-30°C to 60°C
Circuit	Class 2

## Mechanical

Enclosure Construction	PVC High Temperature Flame-Proof Plastic
Certificate	UL2108, UL 1598/CSA 250.0, UL 8750, CSA 250.13
Weight	
Environmental	IP66, NEMA 1, 2, 3R, 4, 4X, 6, 6P, 12, 13
Assembly	PVC Enclosure LED Driver Surge Protector Strain Relief (Set) Electrical Connectors (Set)

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com





## BL CBOX SDR

Fully Assembled Control + Power Boxes  
Single Circuit, 10W, 24VDC, CV, Non-Dimmable

## HT10AS

Printed

## Dimensions

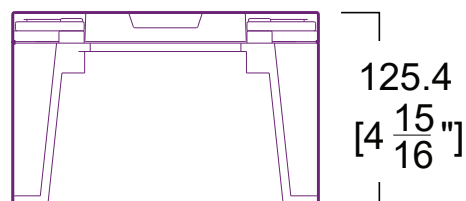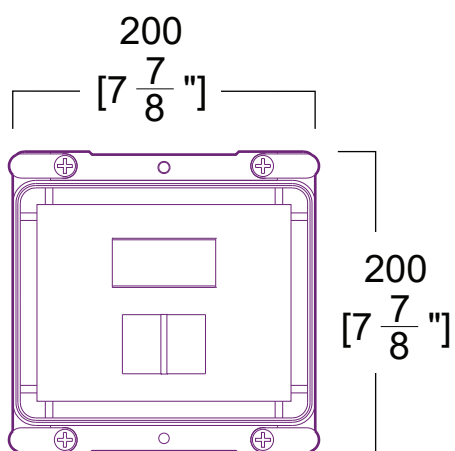

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

[bllighting.com](http://bllighting.com)

