


## BL controlTASK DMX

DMX512 Master Controller  
Programmable

## TPD

Printed

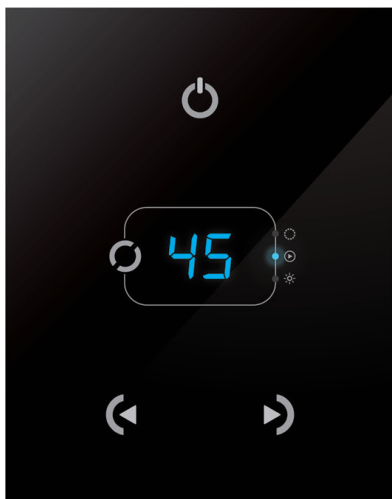

### Certification



### Electrical

Input Voltage	5V - 12VDC
Operating Temperature	32°F to 122°F (0°C to 50°C)

### Mechanical

Housing Construction	Glass Touch Panel, Black Frame
Mounting	Single or Double Gang Wall Socket
Weight	0.32lb (145g)
Environmental	IP20

### Features

- DMX 512 Protocol
- 8 Preloaded Scenes
- Digital Display
- 4 Touch Sensitive Buttons
- Mac OSX and Windows

### Connections

Mini-USB 2.0  
RJ45 DMX  
8 Dry Contact Points

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




## BL controlTASK DMX

DMX512 Master Controller  
Programmable

## TPD

Printed

## Dimensions

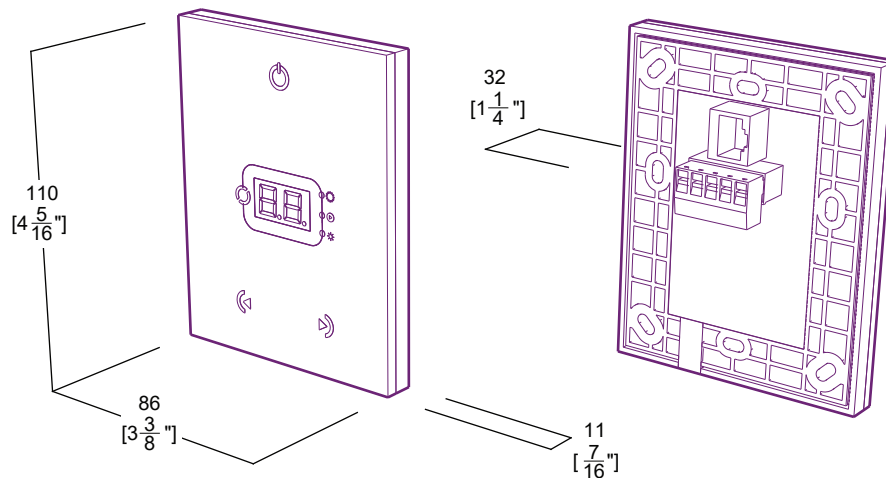

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING.** ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com  
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

**bllighting.com**

