


## BL CBOX DMX

Fully Assembled Control + Power Boxes  
Dual Circuit, 60W, 24VDC, CV, DMX512 Enabled

## FH60BCDL

Printed

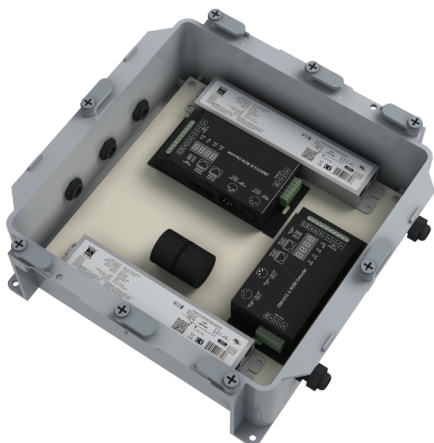

### Certification



### Electrical

Input Voltage	120V - 277VAC
Input Frequency	60 Hz
Max Input Current	(x2) 2A
Output Voltage	(x2) 24VDC, 2.5A, Constant Voltage
Load	(x2) 60W
Connections	18 AWG, Copper Conductors
Min Load	20% - 25%
Power Factor	0.9
Operating Temperature	-30°C to 60°C
Circuit	Class 2
Control	DMX512

### Mechanical

Enclosure Construction	PVC High Temperature Flame-Proof Plastic
Certificate	UL2108, UL 1598/CSA 250.0, UL 8750, CSA 250.13
Weight	
Environmental	IP66, NEMA 1, 2, 3R, 4, 4X, 6, 6P, 12, 13
Assembly	PVC Enclosure (x2) LED Driver (x2) DMX RDM Decoder, 5CH Carbon Steel Back-Plate Surge Protector Strain Relief (Set) Electrical Connectors (Set)

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

**BL LIGHTING.** ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



## BL CBOX DMX



Fully Assembled Control + Power Boxes  
Dual Circuit, 60W, 24VDC, CV, DMX512 Enabled

## FH60BCDL

Printed



## Dimensions

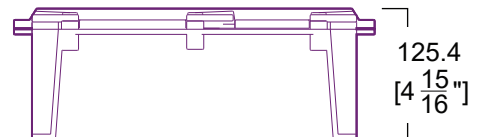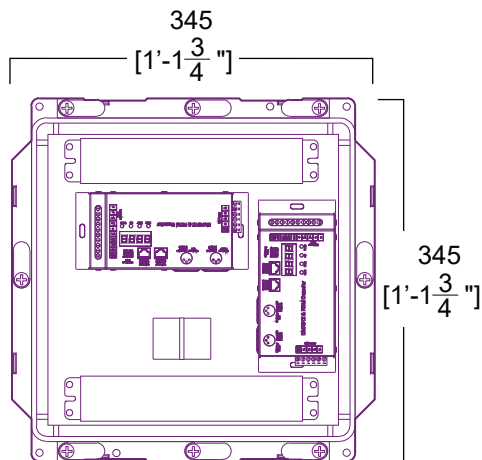

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING.** ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

[bllighting.com](http://bllighting.com)

