


BL driveLINE 10V Series

Dimming LED Driver (0-10V)
20W, Constant Voltage, 24VDC

2010

Printed

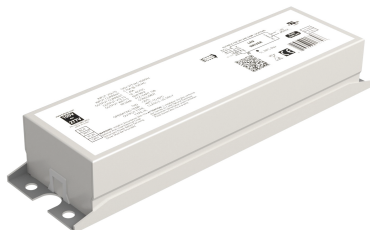

Certification



Electrical

Control	0-10V Dimming, Single Channel
Input Voltage	100V - 277VAC
Input Frequency	50/60 Hz
Max Input Current	100VAC - 0.25A, 277VAC - 0.095A
Output Voltage	24VDC, Constant Voltage
Load	20W
Max Current	0.833A
Connections	18 AWG, Copper Conductors
Min Load	20% - 25%
Power Factor	0.9
Operating Temperature	-20°C to 73°C
Circuit	Class 2

Mechanical

Housing Construction	Metal
Weight	332g (11.7oz)
Environmental	IP64

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




BL driveLINE 10V Series

Dimming LED Driver (0-10V)
60W, Constant Voltage, 24VDC

6010

Printed

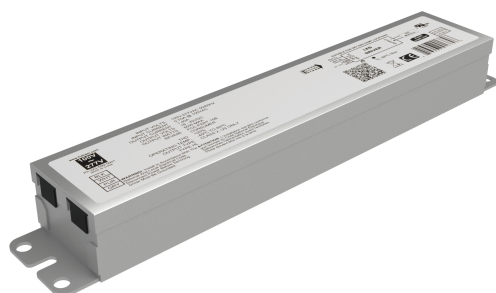

Certification



Electrical

Control	0-10V Dimming, Single Channel
Input Voltage	100V - 277VAC
Input Frequency	50/60 Hz
Max Input Current	100VAC - 0.71A, 277VAC - 0.26A
Output Voltage	24VDC, Constant Voltage
Load	60W
Max Current	2.5A
Connections	18 AWG, Copper Conductors
Min Load	20% - 25%
Power Factor	0.9
Operating Temperature	-20°C to 60°C
Circuit	Class 2

Mechanical

Housing Construction	Metal
Weight	634g (22.4oz)
Environmental	IP64

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com



BL driveLINE 10V Series

Dimming LED Driver (0-10V)
75W, Constant Voltage, 24VDC

7510

Printed



Certification



Electrical

Control	0-10V Dimming, Single Channel
Input Voltage	100V - 277VAC
Input Frequency	50/60 Hz
Max Input Current	100VAC - 0.9A, 277VAC - 0.32A
Output Voltage	24VDC, Constant Voltage
Load	75W
Max Current	3.125A
Connections	18 AWG, Copper Conductors
Min Load	20% - 25%
Power Factor	0.9
Operating Temperature	-20°C to 53°C
Circuit	Class 2

Mechanical

Housing Construction	Metal
Weight	634g (22.4oz)
Environmental	IP64

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




BL driveLINE 10V Series

Dimming LED Driver (0-10V)
20W, Constant Voltage, 24VDC

2010

Printed

Dimensions

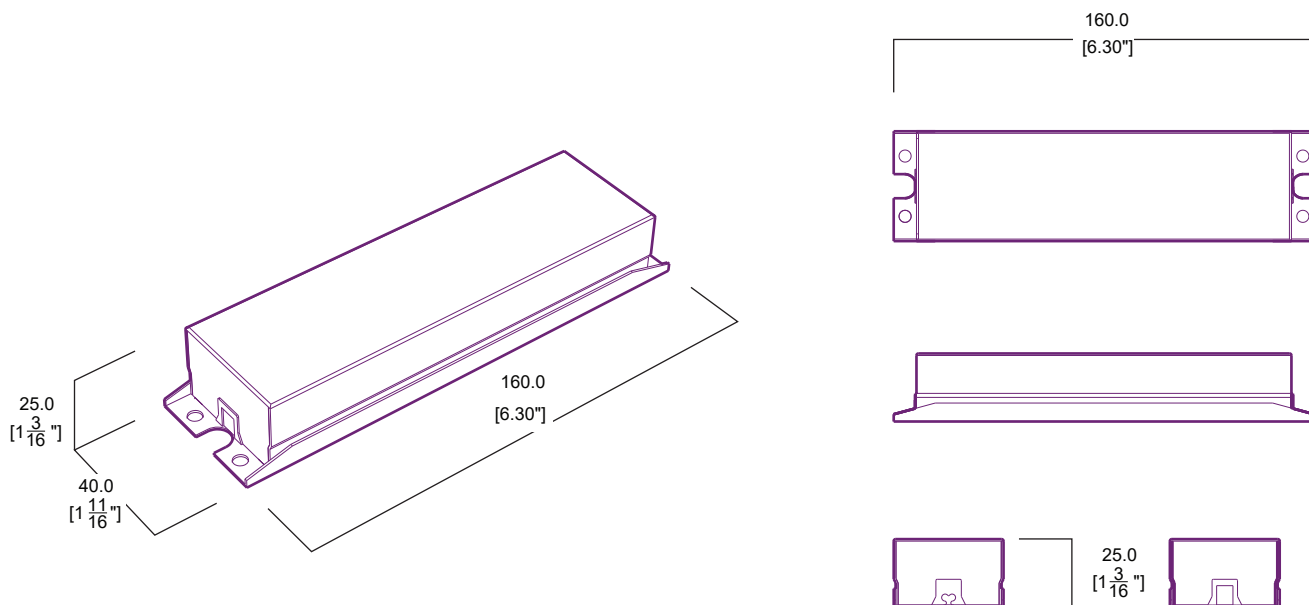

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




BL driveLINE 10V Series

Dimming LED Driver (0-10V)
60W, Constant Voltage, 24VDC

6010

Printed

Dimensions

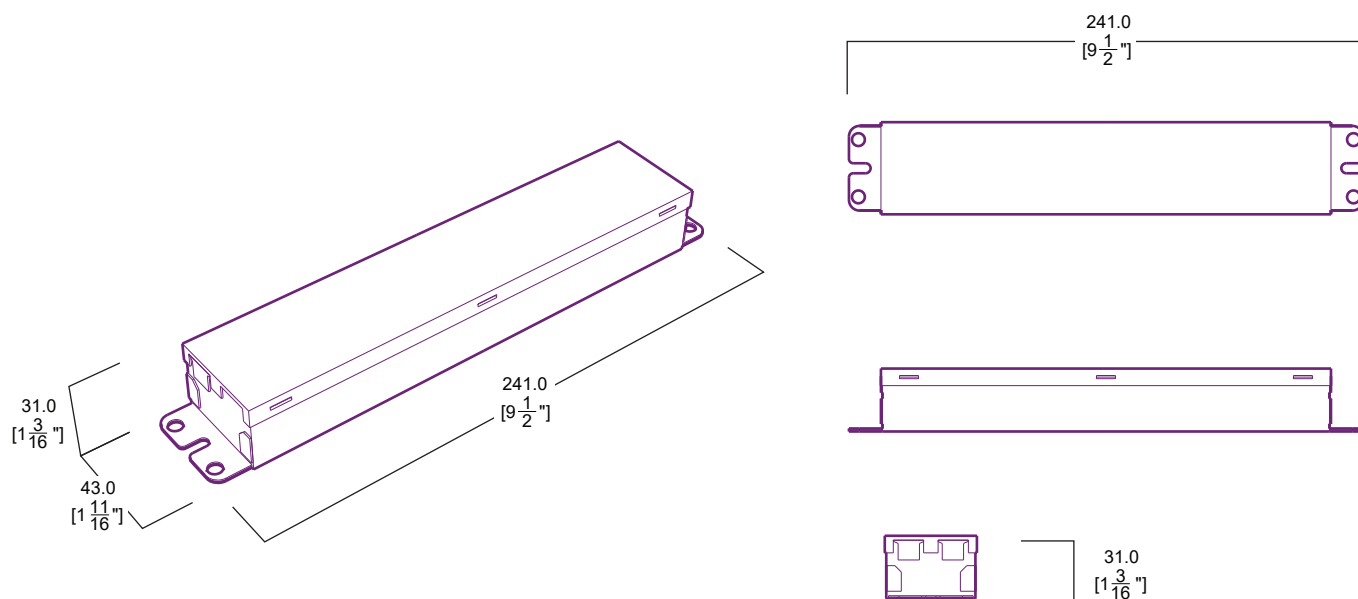

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




BL driveLINE 10V Series

Dimming LED Driver (0-10V)
75W, Constant Voltage, 24VDC

7510

Printed

Dimensions

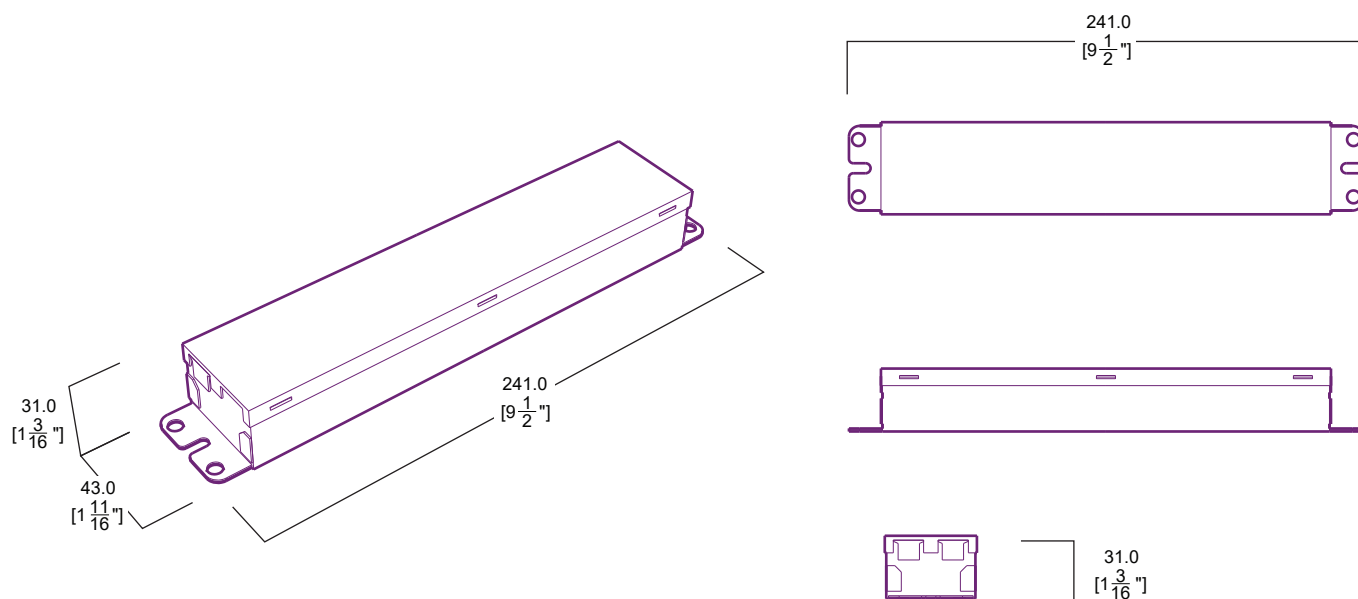

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

