


BL CBOX MLV

Fully Assembled Control + Power Boxes
Single Circuit, 20W, 24VDC, CV, Phase Cut

MG20AM

Printed

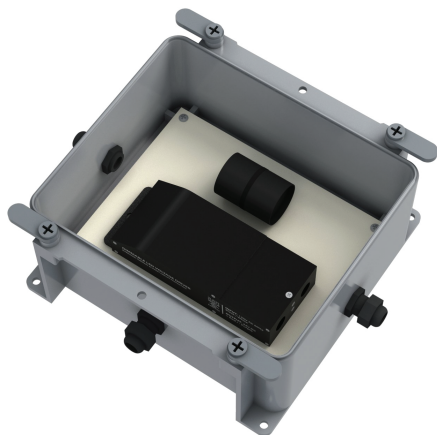

Certification



Electrical

Control	MLV/Standard/Triac
Input Voltage	120VAC
Input Frequency	50/60 Hz
Max Input Current	0.2A
Output Voltage	24VDC, Constant Voltage
Load	20W
Max Current	0.87A
Connections	14 AWG, Copper Conductors
Min Load	8W
Power Factor	0.95
Operating Temperature	-30°C to 50°C
Circuit	Class 2
Min. Dimming Level	25%

Mechanical

Enclosure Construction	PVC High Temperature Flame-Proof Plastic
Certificate	UL2108, UL 1598/CSA 250.0, UL 8750, CSA 250.13
Weight	
Environmental	IP66, NEMA 1, 2, 3R, 4, 4X, 6, 6P, 12, 13
Assembly	PVC Enclosure LED Driver Carbon Steel Back-Plate Surge Protector Strain Relief (Set) Electrical Connectors (Set)

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com





BL CBOX MLV

Fully Assembled Control + Power Boxes
Single Circuit, 20W, 24VDC, CV, Phase Cut

MG20AM

Printed

Dimensions

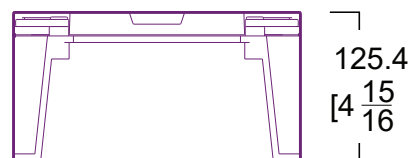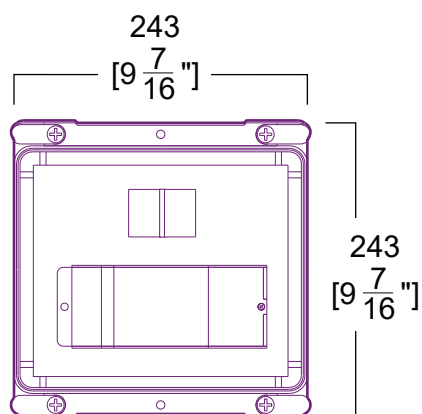

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

