BL solarLAMP

Integrated, Solar-Powered LED Light Beacon
Miniature Accent Light

RC2 Series

Printed Sep.28.2017

Certification

IP65 SOLAR

Lighting

White Red Green Blue Amber

Lamp	Nichia LED
Visibility	330FT (100M)
Average Life	175,000 Hours
Flash Frequency	90/Minute or Steady On

Electrical

Solar Cell	95 mW
Power	1.2V, 300mAh
Battery	Nickel Metal Hydride Battery Cell
Operating Time	8HR to Charge 72HR of Operation on Full Charge
Operating Temprature	-22°F to 158°F (-30°C to 70°C)

Mechanical

Housing Construction	Polycarbonate
Weight	70g (2.5 oz)
Environmental	IP65

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the **BL LIGHTING** catalogue

BL LIGHTING. ILLUMINATE EVERYTHING
111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

BL solarLAMP

Integrated, Solar-Powered LED Light Beacon
Miniature Accent Light

RC2 Series

Printed Sep.28.2017

Ordering

Series	CCT/Color	Control
BL solarLAMP RC2	WH	FH

WH = White
RD = Red
BE = Blue
GN = Green
AR = Amber

FH = Flashing
ST = Static

Dimensions

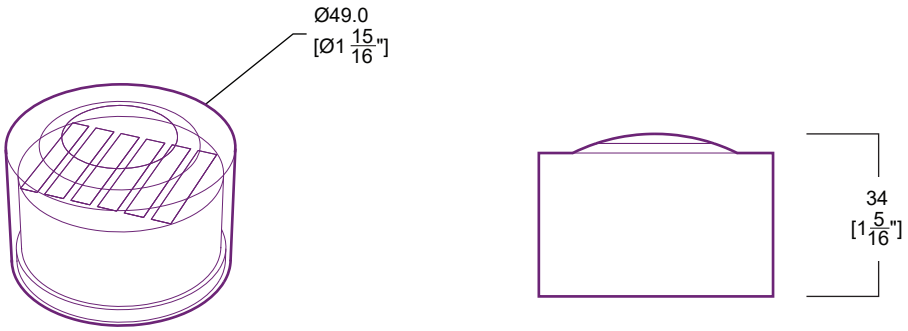

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the **BL LIGHTING** catalogue

BL LIGHTING. ILLUMINATE EVERYTHING
111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com