Flexible, Linear LED Strip Lighting Monochromatic, 24VDC, Constant Voltage

CLIENT

PROJECT NAME

LOCATION

DATE



BL Flexform Dot-Free shines a continuous ribbon of diffused illumination, completely free of dots and hotspots, eliminating the need for a diffuser lens. BL Flexform Dot-Free is ideal for use around highly reflective surfaces such as marble countertops and high gloss tiles, and the extremely low profile is perfect for tight spaces with low clearance. Available in IP20 or IP65 rated for wet locations, and can be quick-shipped in just 1-2 days.



## **Product Detail**

+DC24V	+DC24V +DC24V	د الله +DC24V +DC24V	+DC24V -+DC24V
GND GND	GND GND	GND CND	GND CND

				_		Number of LED's	146 Diodes/FT (478/m)
00	00	LOW	$\bigcirc$	*	Lighting	Beam Angle	120°
IP20	P20 IP65 LOW DIM	DIM	Bluetooth	Lighting	Average Life	50,000 Hours	
()	RoHS	c(UL)us	TITLE 24	5		CCT Binning	SDCM <3 LED's
		JA8 COMPLIANT	YEAR		Controls	0-10V, MLV, ELV, Phase-Cut, Triac, DMX, Bluetooth	
						Input Voltage	24VDC
			Electrical	Max Input Current	4A		
						Connections	20AWG, Copper Conductors
						Circuit	Class 2
					Mechanical	Housing Construction	Flexible PCB Board, Silicone Jacket
					Mechanical	Mounting Options	Clips, Channel, Adhesive
						Ingress Protection	IP20, IP65
					Environmental	Certifications	cULus, CE, RoHS Compliant
						Operating Temperature	-4°F to 104°F (-20°C to 40°C)

## Performance

-									
CCT/Color		2400K	2700К	3000К	3500К	4000К			
Power	W/FT (W/m)	2.44(8)							
Lumens	Im/FT (Im/m)	258 (846)	258 (846)	258 (846)	265 (869)	265 (869)			
Efficacy	lm/W	100	100	100	102	102			
CRI	CRI	91							
Increment	inch (mm)	1.97 (50)							
Max. Length	ft (m)	16ft 4in (5m)							

#### Ordering Dimensions Product Code Series CCT Input Voltage **IP** Rating A D 3 С Width Height DFD2 F 24 End Cap В (IP65 only) Increment 2400K IP20 2700K IP65 Α в С D Section 3000K inch (mm) 3500K 10 DRY(IP20) 0.39 (10) 1.97 (50) 0.08 (2) 4000K Г DMP(IP65) 0.47 (12) 1.97 (50) 0.55 (14) 0.22 (5.5)

# BL LIGHTING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.



1

Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

bllighting.com bllighting.com

# DFD2 BL Flexform

Flexible, Linear LED Strip Lighting Monochromatic, 24VDC, Constant Voltage



### **Compatible Profile**

- Compatibility chart is for DRY (IP20) tape only
- Measurements in inch (mm)





B = Slight visible dots







# BL LIGHTING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.



Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

DFD2 **BL** Flexform Flexible, Linear LED Strip Lighting Monochromatic, 24VDC, Constant Voltage

A = No visible dots


Dotting Table:



C = Clear visible dots

#### **Compatible Profile**

- Compatibility chart is for DRY (IP20) tape only
- Measurements in inch (mm)

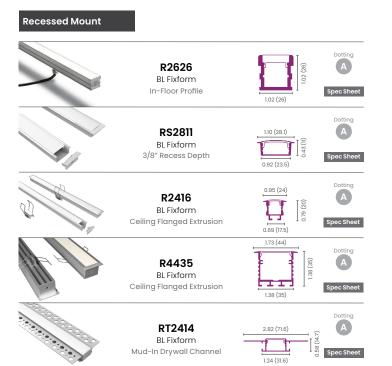

1.24 (31.6)



B = Slight visible dots



**BL LIGHTING** ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8 P: 1-604-874-4405 E: info@bllighting.com Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against prema-ture failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.

For more information se download the BL LIGHTING catalog

bllighting.com

