

BL areaCIRCULAR

Circular DMX controlled LED Wall Washer
36W, Line Voltage

CR212

Printed



Certification



Lighting



Power	36W
Beam Angle	15°, 30°, 40°, 60°
Lumens	3420 lm (White)
Efficacy	95 lm/W (White)

Electrical

Control	DMX
Input Voltage	100-270VAC
Connections	18AWG Copper Conductors
Temp. Range	-22°F to 122°F (-30°C to 50°C)

Mechanical

Environmental	IP66
Cord Length	16" (400mm), extendable

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



BL areaCIRCULAR

Circular DMX controlled LED Wall Washer
36W, Line Voltage

CR212

Printed

Performance

CCT/Color	Load	Lumens	Efficacy
2700K	36 W/Unit	3420 lm/Unit	95 lm/W
3000K	36 W/Unit	3420 lm/Unit	95 lm/W
4000K	36 W/Unit	3420 lm/Unit	95 lm/W
6000K	36 W/Unit	3420 lm/Unit	95 lm/W
RGBW	36 W/Unit	1276 lm/Unit	35 lm/W

Ordering

Series

BL areaCIRCULAR CR212


CCT/Color

27 = 2700K
30 = 3000K
40 = 4000K
60 = 6000K
M2 = RGBW

Beam

15 = 15°
30 = 30°
40 = 40°
60 = 60°

Dimensions

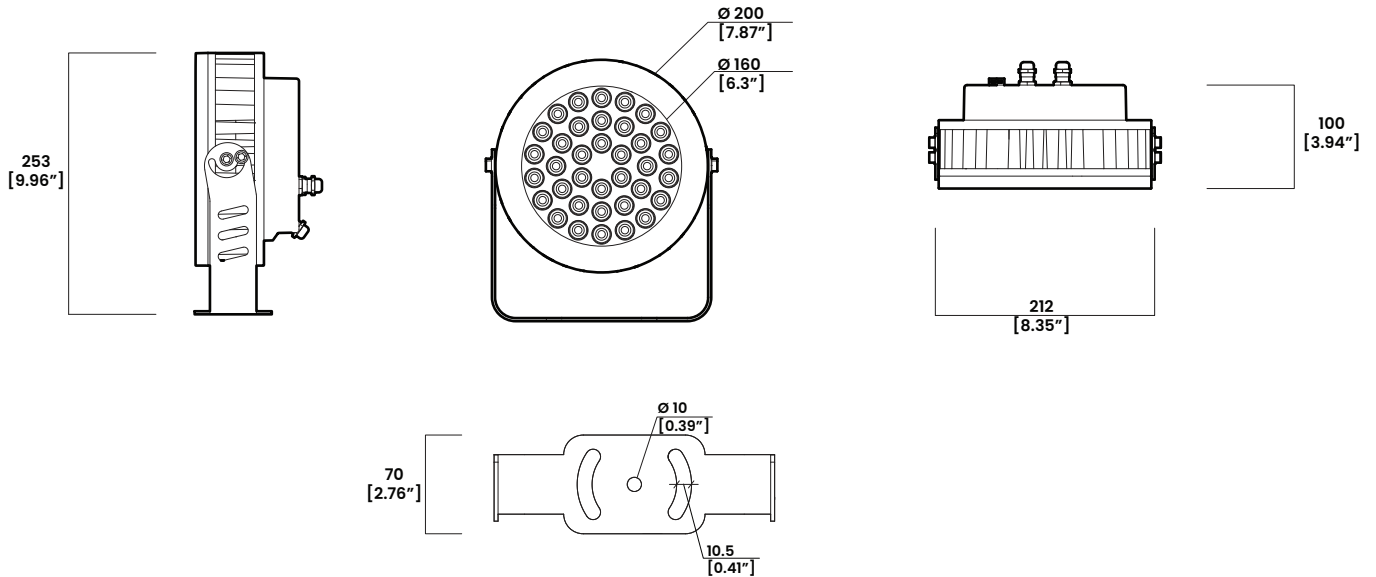

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com

