

**BL fixFORM**

Indoor Recessed Aluminum Channel  
Designed for use with **BL flexFORM** Series

**RC Shallow 2811**

Printed



**Certification**



**Mechanical**

Housing Construction	Aluminum Channel Polycarbonate Optic (75% Trans.) Plastic End Caps
Environmental	IP20
Stock Length	6ft
Minimum Cut Length	Based on <b>BL flexFORM</b> Increments

**Components**

RCCH	Aluminum Base Channel
RCSHLN	Polycarbonate Optic
RCSHEC	Plastic End Cap

**BL flexFORM Compatibility**

BL flexFORM Series	Unjacketed (IP20)	Jacketed (IP65,68)
D1	o	o
D2	o	o
D3	o	o
D4	o	o
N2	o	o
RGBW	o	o
DW	o	o

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the **BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

[bllighting.com](http://bllighting.com)




**BL fixFORM**

Indoor Recessed Aluminum Channel  
Designed for use with **BL flexFORM** Series

**RC Shallow 2811**

Printed

**Dimensions**

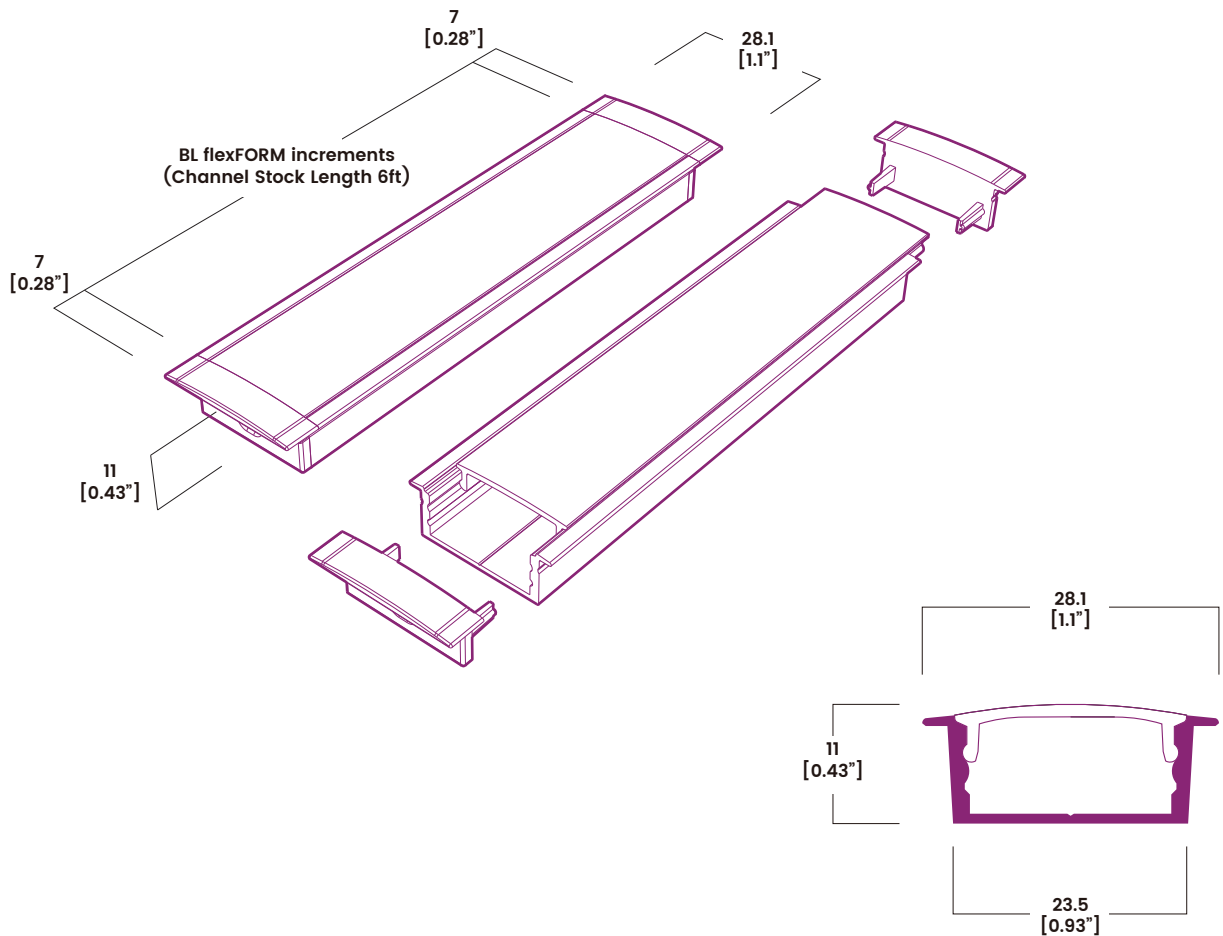

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

[blighting.com](http://blighting.com)

