

## BL neonVIEW

Diffused, Flexible, Linear LED Lighting, 24VDC, Constant Voltage

## DOME SI RGBW

Dome Profile, Silicone, Color Changing

Printed



### Certification



### Lighting



Lamp	LED, SMD 5050
LED's Per Foot	18 Diodes/FT (60 Diodes/m)
Power	* 3.66-4.57 W/FT
Beam Angle	160°
Average Life	50,000 Hours
Lumens	* 86-140 lm/FT
Efficacy	* 24-31 lm/W

### Electrical

Control	DMX, Bluetooth
Input Voltage	24VDC
Max Input Current	4.12A (White)
Connections	20AWG, Copper Conductors
Operating Temperature	-40°F to 131°F (-40°C to 55°C)
Circuit	Class 2

### Mechanical

Housing Construction	Injection Moulded White Silicone
Cutting Increments	3-15/16" (100mm)
Maximum Run Length	* 21FT (6.5m) to 26FT (7.9m )
Medial Bend Radius	60mm (2-1/4")
Environmental	IP68 (Seamless Injection Molded)
Mounting	Clip, Track

### Accessories

NVTK	** Factory installed termination kit
NVJC	Factory installed jumper cable
NVCP	Surface Mounting Clip
NVMCH	Surface Mounting Channel
NVRMC	Recessed Mounting Clip
NVRMCH	Recessed Mounting Channel

\* Please refer to the performance table on the following page

\*\*Multiple Lead Orientation options available

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



## BL neonVIEW

Diffused, Flexible, Linear LED Lighting, 24VDC,  
Constant Voltage

## DOME SI RGBW

Dome Profile, Silicone, Color Changing

Printed

## Performance

CCT/Color	Load	Lumens	Efficacy	Max. Length	Cutting Increments
RGB	3.66 W/FT	86 lm/FT	24 lm/W	25 ft 11 in	3-15/16 in (100mm)
RGB27K	4.57 W/FT	135 lm/FT	29 lm/W	20 ft 9 in	3-15/16 in (100mm)
RGB30K	4.57 W/FT	137 lm/FT	30 lm/W	20 ft 9 in	3-15/16 in (100mm)
RGB40K	4.57 W/FT	140 lm/FT	31 lm/W	20 ft 9 in	3-15/16 in (100mm)

## Ordering

Product Name

BL neonVIEW DOME SI RGBW 24V

CCT/Color

M1 = RGB  
M2 = RGB27K  
M3 = RGB30K  
M4 = RGB40K

Lead Orientation

NVTKBC = Back Lead  
NVTKEC = End Lead  
NVTKRSC = Right Side Lead  
NVTKLSC = Left Side Lead

Mounting Accessories

NVCP = Mounting Clip  
NVMCH = Mounting Channel  
NVRMC = Recessed Mounting Clip  
NVRMCH = Recessed Mounting Channel

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



## BL neonVIEW

Diffused, Flexible, Linear LED Lighting, 24VDC,  
Constant Voltage

## DOME SI RGBW


Dome Profile, Silicone, Color Changing

Printed

### Lead Orientation


#### Back Lead

Part# NVTK68SMBC




#### End Lead

Part# NVTK68SMEC




#### Right Side Lead

Part# NVTK68SMRSC




#### Left Side Lead

Part# NVTK68SMLSC



### Minimum Bend Radius and Bend Orientations

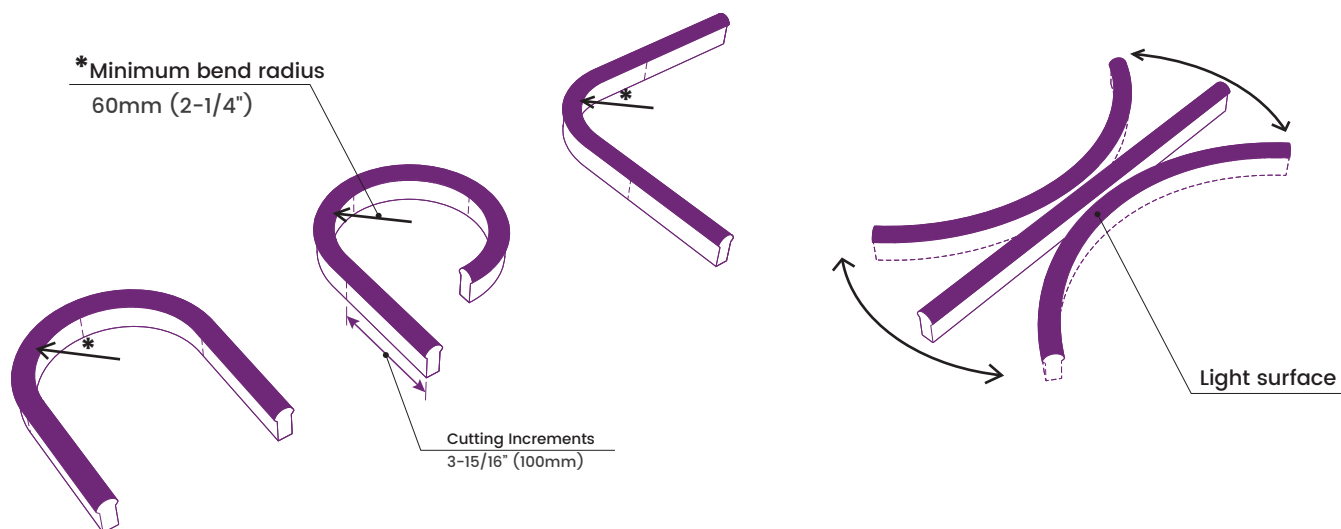

BL neonVIEW DOME Series bends horizontally  
Vertical bend option available on  
BL neonVIEW SIDE Series

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



## BL neonVIEW

Diffused, Flexible, Linear LED Lighting, 24VDC,  
Constant Voltage

## DOME SI RGBW

Dome Profile, Silicone, Color Changing


Printed

## Dimensions

BL neonVIEW NVTK SM xx : Seamless, injection molded termination kit including Lead and end cap


### Back Lead

Part# NVTK68SMBC

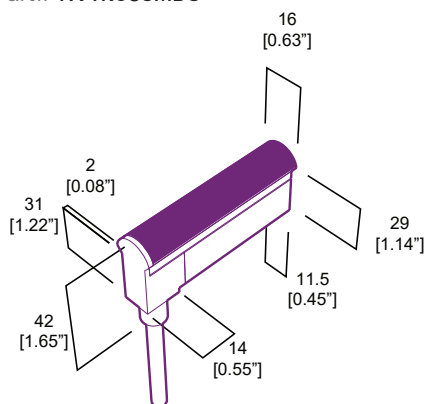


### End Lead

Part# NVTK68SMEC

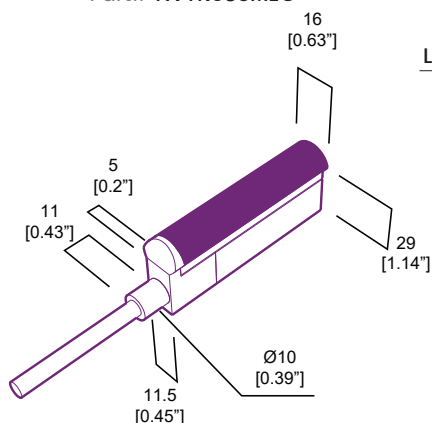


### End Cap

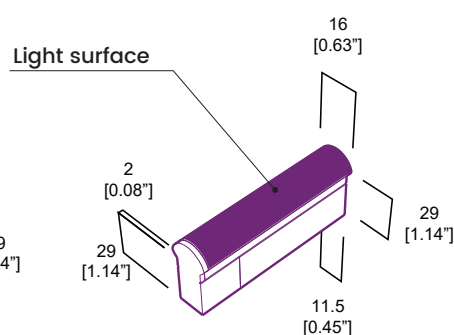


### Right Side Lead

Part# NVTK68SMRSC

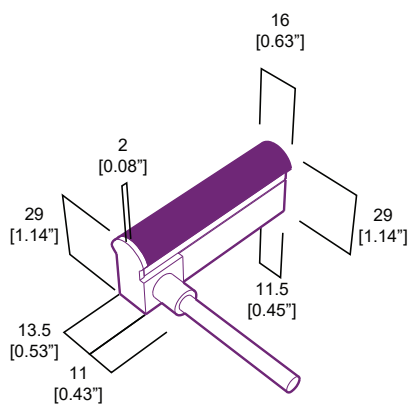

### Left Side Lead

Part# NVTK68SMLSC

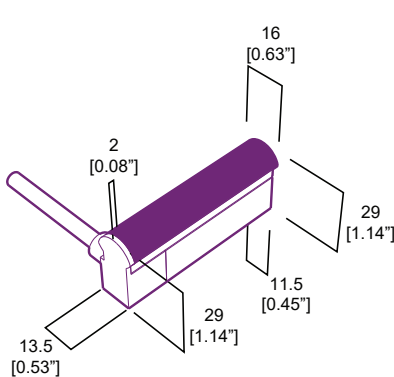

The tolerance of the Lead is  $\pm 0.5\text{mm}$   
For more detail, please download the CAD Drawing

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com



## BL neonVIEW

Diffused, Flexible, Linear LED Lighting, 24VDC,  
Constant Voltage

## DOMESTIC SI RGBW



Dome Profile, Silicone, Color Changing

Printed

## Accessories (Surface Mounting Clip and Channel)



### Surface Mounting Clip

Part# NVCP



### Surface Mounting Channel

Part# NVMCH

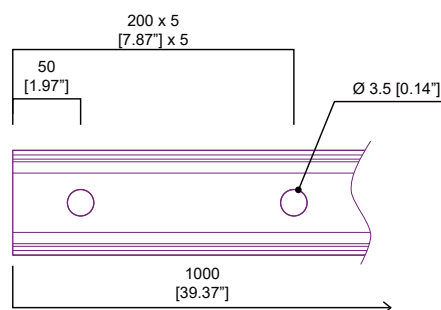

For more detail, please download the CAD Drawing

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



**BL neonVIEW**

Diffused, Flexible, Linear LED Lighting, 24VDC,  
Constant Voltage

**DOMESTIC SI RGBW**

Dome Profile, Silicone, Color Changing



Printed



**Accessories (Recessed Mounting Clip and Channel)**



**Recessed Mounting Clip**

Part# NVRMC



**Recessed Mounting Channel**

Part# NVRMCH

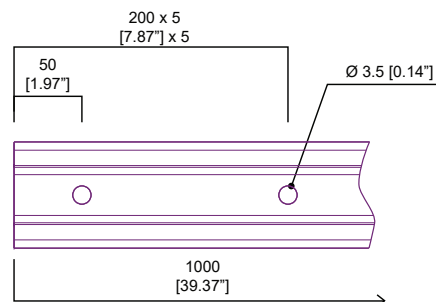

For more detail, please download the CAD Drawing

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

**blighting.com**

