

BL puck

Undercounter Lighting
3.6W, 12VDC Constant Voltage

Square


Printed



Certification



Lighting



Beam Angle	120°
CRI	90+
Lumens	235 - 276lm
Efficacy	65 - 77 lm/W

Electrical

Controls	0-10V, MLV, ELV
Input Voltage	12VDC
Power	3.6W
Cord Length	23.6" (60cm)

Mechanical

Weight	80g (0.17lb)
Environmental	IP20

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com



BL puck

Undercounter Lighting
3.6W, 12VDC Constant Voltage

Square

Printed

Performance

CCT/Color	Load	Lumens	Efficacy
2700K	3.60 W	235 lm	65 lm/W
3000K	3.60 W	254 lm	71 lm/W
4000K	3.60 W	276 lm	77 lm/W

Ordering

Series

BL puckLIGHT SQ


CCT/Color

27 = 2700K
30 = 3000K
40 = 4000K

Finish

N = Nickel
W = White
B = Black

Dimensions

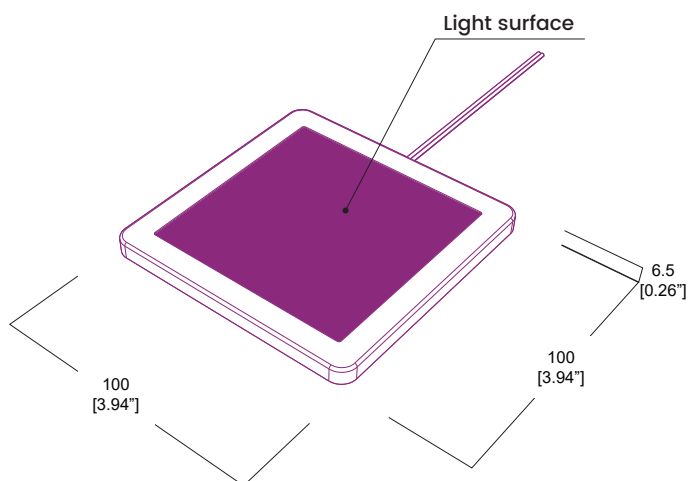

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

