

BL fiberSOURCE

LED light engine designed for BL fiberOPTIC
20W, 24VDC

Mira


Printed



Certification



Lighting



Lamp	High Powered LED, White light
Average Life	50,000 Hours
Lumen	1,900lm (4000K)
Efficacy	95lm/W

Electrical

Input Voltage	100-240VAC, 50/60Hz
Output Voltage	24VDC, 2.5A, 60W Maximum
Load	20W
Operating Temperature	14°F to 113°F (-10°C to 45°C)

Mechanical

Housing Construction	ABS
Aperture	1 3/16" (30mm)
Weight	1.86lb (842g)
Environmental	IP20
Wheel Options	Color Wheel, Twinkle Wheel

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



BL fiberSOURCE

LED light engine designed for BL fiberOPTIC
20W, 24VDC

Mira

Printed

Performance

CCT/Color	Load	Lumens	Efficacy
3000K	20 W/Unit	1,150 lm	58 lm/W
4000K	20 W/Unit	1,900 lm	95 lm/W

Ordering

Series

BL fiberSOURCE Mira



Color Option

30 = 3000K
40 = 4000K

Effect

NO = No Effect
TW = Twinkle Wheel
CW = Color Wheel

Dimensions

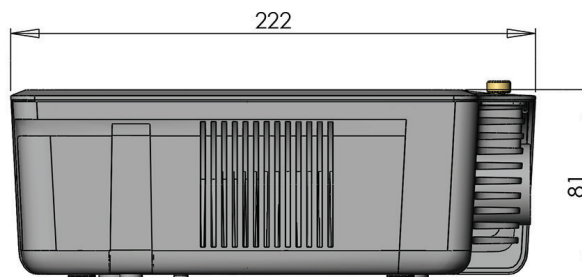

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com

