

BL puck

Undercounter Lighting
3.6W, 12VDC Constant Voltage

Round


Printed



Certification



Lighting



Beam Angle	120°
CRI	90+
Lumens	237 - 272lm
Efficacy	66 - 76 lm/W

Electrical

Controls	0-10V, MLV, ELV
Input Voltage	12VDC
Power	3.6W
Cord Length	23.6" (60cm)

Mechanical

Weight	62g (0.14lb)
Environmental	IP20

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com



BL puck

Undercounter Lighting
3.6W, 12VDC Constant Voltage

Round

Printed


Performance

CCT/Color	Load	Lumens	Efficacy
2700K	3.60 W	237 lm	66 lm/W
3000K	3.60 W	257 lm	71 lm/W
4000K	3.60 W	272 lm	76 lm/W

Ordering

Series	CCT/Color	Finish
BL puck Round	<input type="text"/>	<input type="text"/>
	27 = 2700K 30 = 3000K 40 = 4000K	N = Nickel W = White B = Black

Dimensions

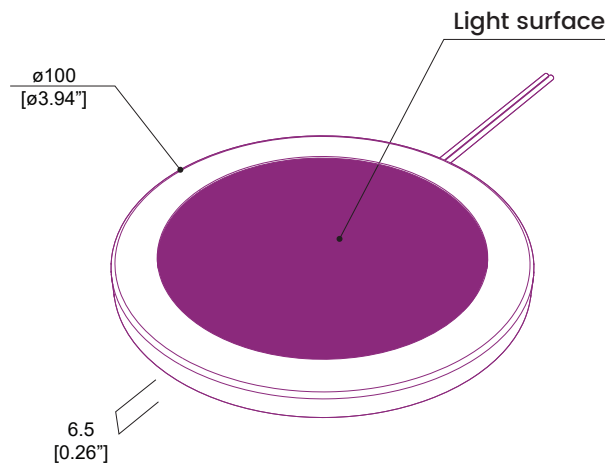

PROJECT CLIENT TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada, V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@bllighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

