

BL controlTASK IC

IC Type Controller
Compatible with **BL neonVIEW IC Series**

SLE7

Printed



Certification



Electrical

Input Voltage	5-5.5 VDC 0.6A
Operating Temperature	32°F to 122°F (0°C to 50°C)

Mechanical

Housing Construction	Plastic
Weight	0.2lb (120g)
Environmental	IP20
Dimensions	3.1" x 3.6" x 1.7" (79mm x 92mm x 43mm)

Features

- DMX512 Protocol
- 2 Universes
- SD Memory Card
- Mac OS X, Windows OS
- Network synchronisation
- Clock and Calendar Trigger
- Digital Display

Connections

Mini USB
DMX XLR3
DMX XLR5
Ethernet
HEIO

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com




BL controlTASK IC

IC Type Controller
Compatible with **BL neonVIEW IC Series**

SLE7

Printed

Dimensions

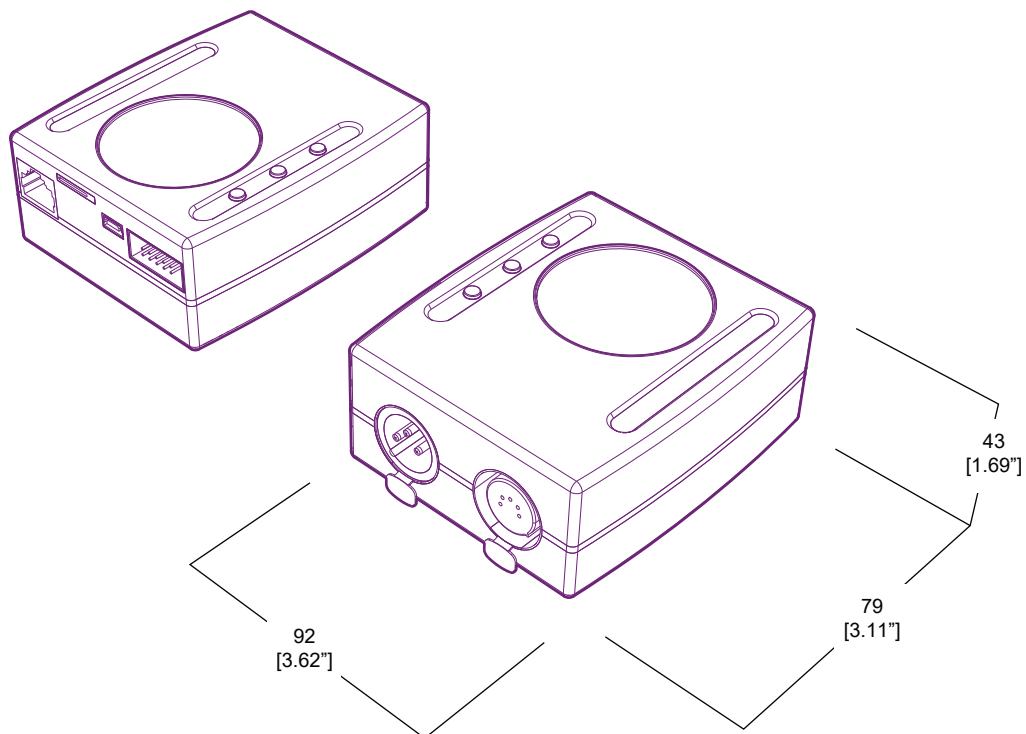

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

