

**BL areaLINEAR**

Linear, DMX controlled LED Wall Washers  
150W, Line Voltage

**LN1312**


Printed



**Certification**



**Lighting**



Lamp	CREE, 16 pcs
Power	150W
Beam Angle	3°, 8°, 15°, 25°, 10°x45°
Lumen Maintenance	50,000 hours
Lumens	9000 lm (white), 4725 lm (RGBW)
Efficacy	60 lm/W (white), 31.5 lm/W (RGBW)

**Electrical**

Control	DMX, IC (Pixel), Bluetooth
Input Voltage	100-277VAC
Operating Temperature	-4°F to 122°F (-20°C to 50°C)
Maximum Units in Series	10
Connections	17AWG, Copper conductors
Power Cord Length	1ft (0.3m), extendable
DMX Cords Length	1ft (0.3m), extendable

**Mechanical**

Environmental	IP66
Housing Construction	Aluminum body, tempered glass lens
Weight	24 lb (11 kg)
Mounting	Mounting Harness on Bracket
Adjustable Bracket	Adjustable bracket

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

**bllighting.com**



**BL areaLINEAR**

Linear, DMX controlled LED Wall Washers  
150W, Line Voltage

**LN1312**

Printed

**Performance**

CCT/Color	Power	Lumens	Efficacy
2700K	150 W/Unit	9000 lm/Unit	60 lm/W
3000K	150 W/Unit	9000 lm/Unit	60 lm/W
4000K	150 W/Unit	9000 lm/Unit	60 lm/W
6500K	150 W/Unit	9000 lm/Unit	60 lm/W
RGB30K	150 W/Unit	4725 lm/Unit	31.5 lm/W
RGB40K	150 W/Unit	4725 lm/Unit	31.5 lm/W
RGB60K	150 W/Unit	4725 lm/Unit	31.5 lm/W

**Ordering**

Series	CCT/Color	Beam
BL areaLINEAR LN1312	<p>27 = 2700K</p> <p>30 = 3000K</p> <p>40 = 4000K</p> <p>65 = 6500K</p> <p>M3 = RGB30K</p> <p>M4 = RGB40K</p> <p>M6 = RGB60K</p>	<p>*3 = 3° x 3°</p> <p>8 = 8° x 8°</p> <p>15 = 15° x 15°</p> <p>25 = 25° x 25°</p> <p>10x45 = 10° x 45°</p>

\* The 3° option is only available for white CCTs.

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

**bllighting.com**




**BL areaLINEAR**

Linear, DMX controlled LED Wall Washers  
150W, Line Voltage

**LN1312**

Printed

**Dimensions**

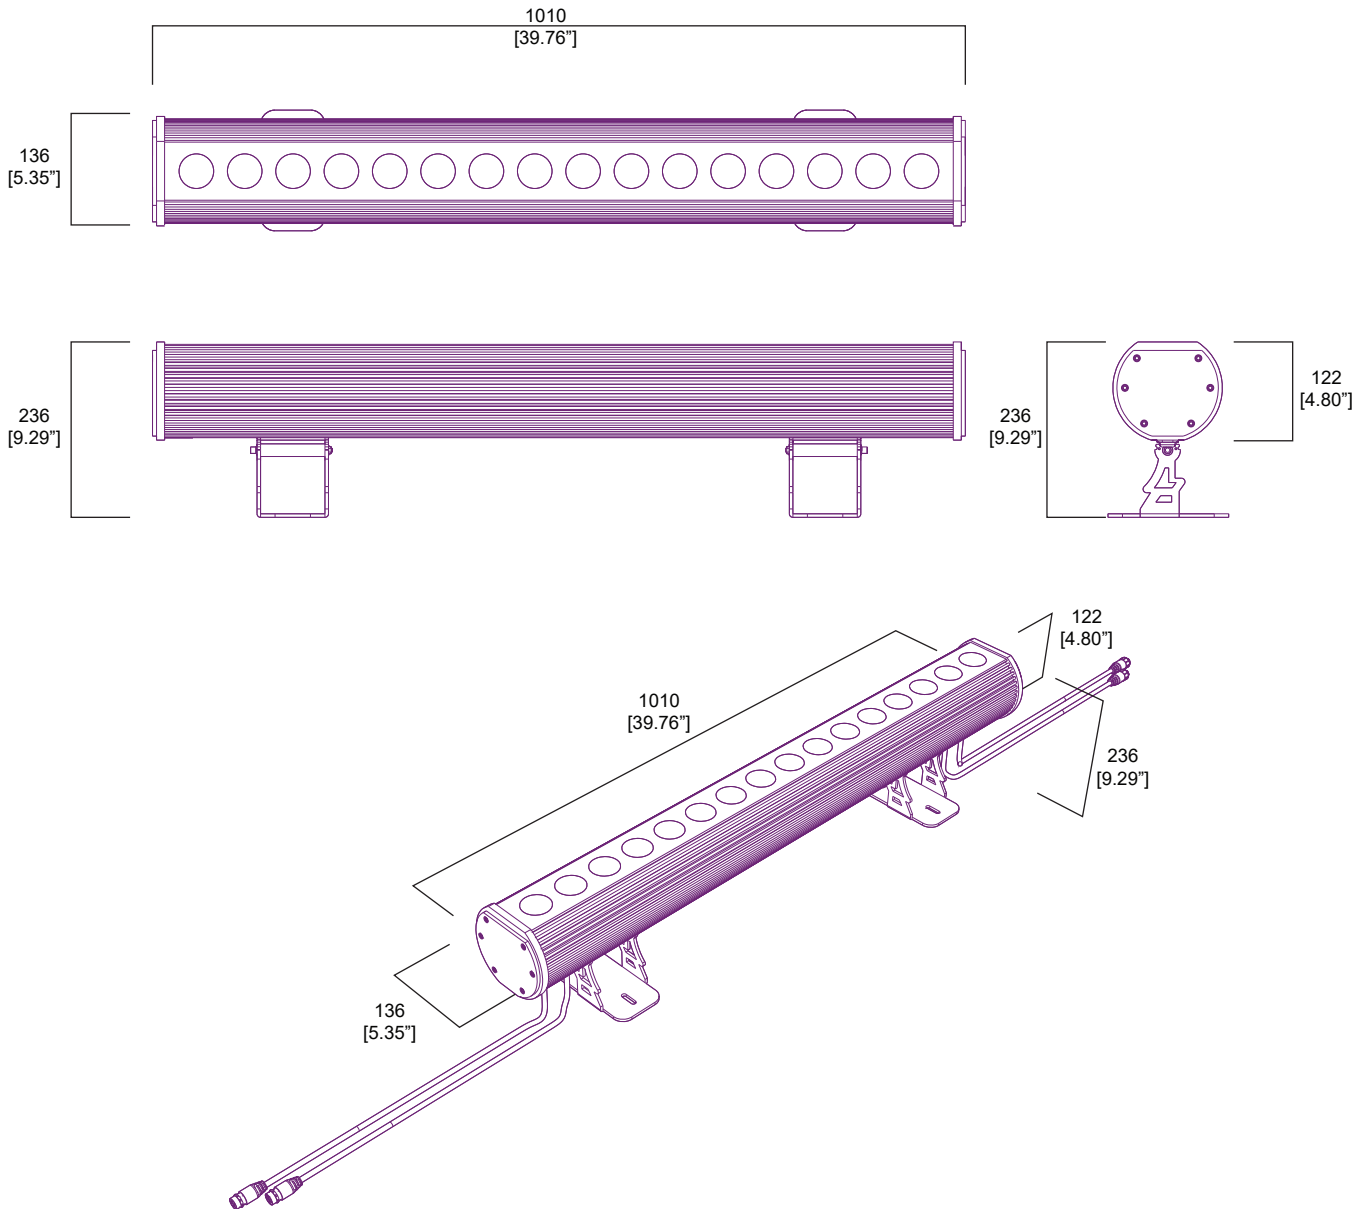

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

For more information, please download the  
**BL LIGHTING** catalogue

**BL LIGHTING. ILLUMINATE EVERYTHING**

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

**bllighting.com**

