

## BL inGROUND

Circular, Outdoor Recessed Luminaire  
3W, 24VDC Constant Voltage

## DISK 173

Printed



### Certification



### Lighting



Lamp	SMD3030 LED6 x 0.5W
CRI	86
Power	3W/Unit
Average Life	50,000 Hours
Lumens	13 lm/Unit
Efficacy	4 lm/W
Beam	Uni, Bi and Quad-directional

### Electrical

Control	0-10V, MLV, ELV, Phase-Cut, Triac, DMX, Bluetooth
Input Voltage	24VDC
Connections	16AWG, Copper Conductors
Power Cable Length	20" (50cm)
Operating Temperature	-4°F to 104°F (-20°C to 40°C)

### Mechanical

Environmental	IP67
Housing	Powder coated aluminum
Trim	316 stainless steel
Trim Diameter	6.81" (173 mm)
Gasket	Silicone seal
Mounting Sleeve	ABS Plastic
Weight	Sleeve = 0.45 lb (0.2kg) Luminaire = 3.6 lb (1.65kg)
Weight Bearing	4409lbs (2000 kg)
Impact Protection Rating	IK10

PROJECT

CLIENT

TYPE

**BL LIGHTING**  
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations.  
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure.  
Lack of surge protection may void your warranty.

Specifications subject to change without notice.  
Please refer to our website at [bllighting.com](http://bllighting.com) for current technical data.

For more information,  
please download the  
**BL LIGHTING** catalog

[bllighting.com](http://bllighting.com)



## BL inGROUND

Circular, Outdoor Recessed Luminaire  
3W, 24VDC Constant Voltage

## DISK 173

Printed




### Performance

CCT	Power (Unit)	Lumens (Unit)
2000K	3 W	13 lm
3000K	3 W	13 lm
6000K	3 W	13 lm

### Ordering

Series	CCT	Beam
BL inGROUND DISK 173	<div></div>	<div></div>
	20 = 2000K	1D = Uni-directional
	30 = 3000K	2D = Bi-directional
	60 = 6000K	4D = Quad-directional

### Dimensions

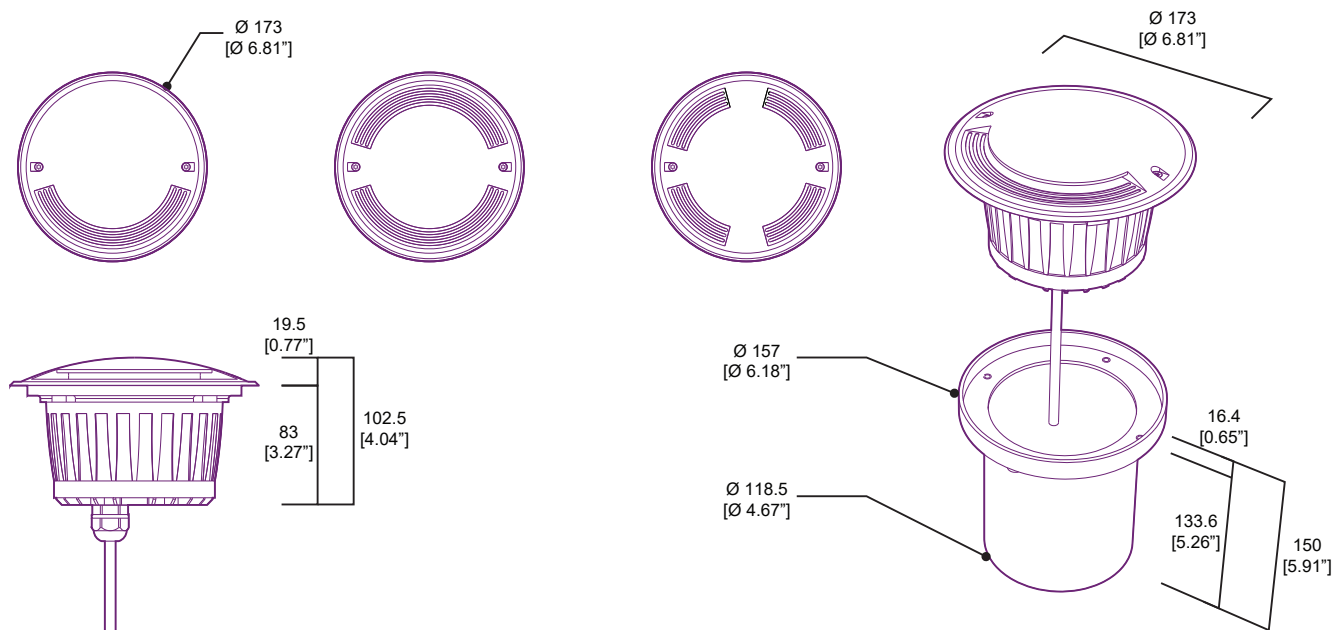

### BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@blighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations.  
Surge protection is highly recommended for all LED lighting products and should  
be on a designated circuit to protect against premature failure  
Lack of surge protection may void your warranty

Specifications subject to change without notice.  
Please refer to our website at blighting.com for current technical data.

For more information,  
please download the  
BL LIGHTING catalog

[blighting.com](http://blighting.com)

