

3 Side Select V Tunable

BL Select Neon

Diffused, Flexible, Linear LED Lighting,
24VDC, Constant Voltage, Vertical Bend,
3 Sided Light, Silicone, Tunable White





Emitting light from three surfaces of its square-shaped profile, **3 Side Select V Tunable** provides smooth, dot-free illumination with adjustable color temperature for dynamic white effects. Its vertical bending design adapts to curved or linear installations, while the IP68-rated construction ensures reliable indoor and outdoor performance. Ideal for architectural facades, contour accents, residential and commercial interiors, hospitality and retail environments, as well as signage, displays, and decorative projects.

Dot-free Seamless connections -40°F to 131°F (-40°C to 55°C)

3 Sided Light Tunable White

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail

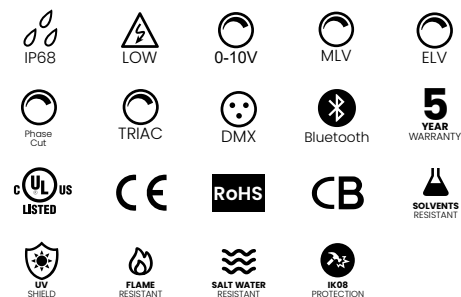

Lighting	Lamp	LED, SMD 2835
	LED's Per Foot	37 LEDs/ft (120 LEDs/m)
	Beam Angle	210°
	Average Life	50,000 Hours
	CCT Binning	SDCM < 3, One Step Binning
Electrical	Controls	0-10V, MLV, ELV, Phase-Cut, TRIAC, DMX, Bluetooth
	Input Voltage	24VDC
	Max Input Current	4.12A (White)
	Connections	3x20AWG Wires
	Power Cable Length	Standard 10ft (3m). Also available in 16ft (5m)
Mechanical	Circuit	Class 2
	Housing Construction	Injection Moulded White Silicone
	Mounting	Mounting Clips, Mounting Channels
	Weight	0.31 lb/ft, 0.46 kg/m
	Dimensions	W: 0.65" x H: 0.65" (W: 16.5mm x H: 16.5mm)
Environmental	Minimum Bend Radius	2.36" (60mm)
	Operating Temperature	-40°F to 131°F (-40°C to 55°C)
	Ingress Protection	IP68
	Impact Protection	IK08
	Resistance	UV, Flame, Solvents, Saltwater and Dirt Resistant
Certifications		cULus, CE, RoHS Compliant, CB

Performance

CCT/Color		2200K + 5700K	2700K + 5700K	3000K + 5700K
Power	W/FT (W/m)	3.66(12)		
Lumens	lm/FT (lm/m)	88.4+122(290+400)	94.5+122(310+400)	94.5+122(310+400)
Efficacy	lm/W	24+33	26+33	26+33
CRI	CRI	80		
Increment	inch (mm)	3.94 (100)		
Max. Length	ft (m)	26.6ft (8.1m)		

Ordering

Product Code	Series	CCT	Input Voltage	IP Rating
3SVTN	SEN		24	IP68
		2200K+5700K		
		2700K+5700K		
		3000K+5700K		

Note:
Lengths, Lead Orientations & Mounting Accessories for
BL Select Neon must be confirmed at time of order.

BL LIGHTING
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information,
please download the
BL LIGHTING catalog

bllighting.com



3 Side Select V Tunable




BL Select Neon

Diffused, Flexible, Linear LED Lighting,
24VDC, Constant Voltage, Vertical Bend,
3 Sided Light, Silicone, Tunable White



Minimum Bend Radius and Bend Orientation

Beam Angle

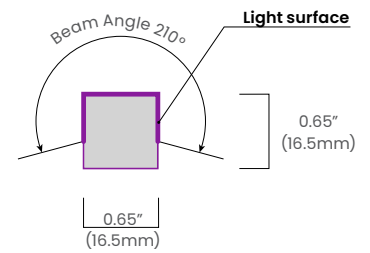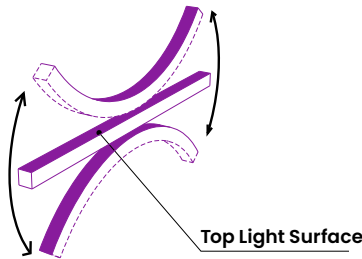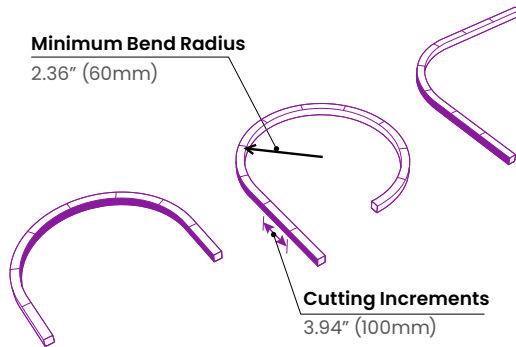


BL Select Neon 3 Side Series bends vertically

Average Beam Angle (50%), 3000K: 156°

Dimensions & Lead Orientations


Back Lead

SEN 3SL BC 68

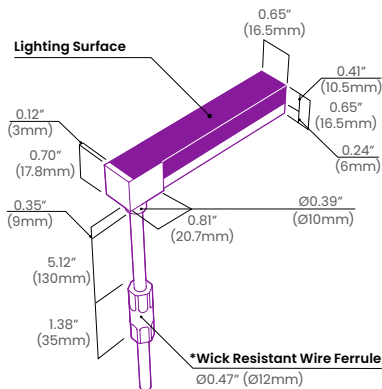


End Lead

SEN 3SL EC 68

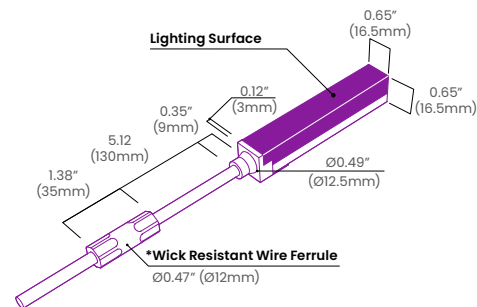


Right Side Lead

SEN 3SL RC 68

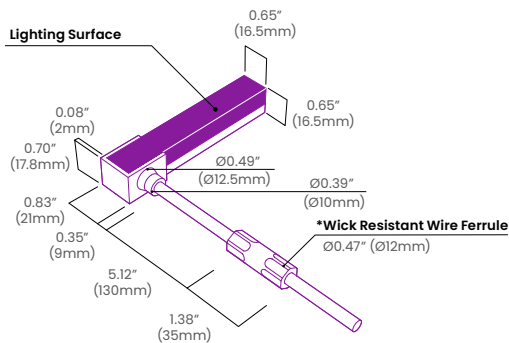

End Cap



*The Wick Resistant Wire Ferrule is built into the lead wire, 5.12"(130mm) from the BL Select Neon Series Termination Connection, for additional moisture ingress protection. Removal of the Wick Resistant Wire Ferrule may void your warranty.

BL LIGHTING
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

