


NSTK20, NSTK65

Termination Kit for BL Flexform N and E Series, Connector w/10FT Leads


| | |
|-----------------------|---|
| Housing Construction | Silicone Jacket (IP65 only) |
| Connections | 20AWG, Copper Conductors |
| Operating Temperature | -20°C to 40°C (-4°F to 104°F) |
| Circuit | Class 2 |
| Length | 10' |
| Environmental | IP20 or IP65(w/ end caps and silicone jacket) |

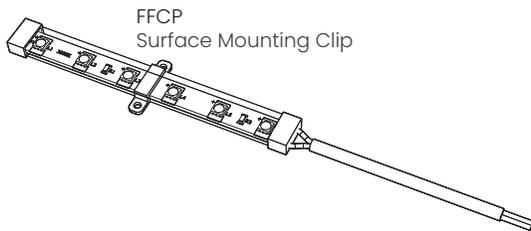

FFCP

Surface Mounting Clip for BL Flexform Series

| | |
|----------------------|----------|
| Housing Construction | Silicone |
|----------------------|----------|

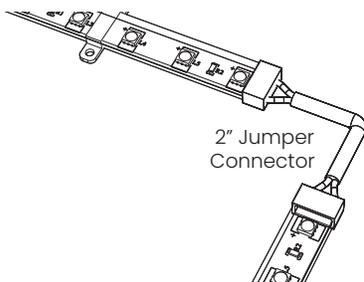

DSJC20, DSJC65

2" Jumper Connector for BL Flexform Series

| | |
|-----------------------|---|
| Housing Construction | Silicone Jacket (IP65 only) |
| Connections | 20AWG, Copper Conductors |
| Operating Temperature | -20°C to 40°C (-4°F to 104°F) |
| Circuit | Class 2 |
| Length | 2" (or Custom) |
| Environmental | IP20 or IP65(w/ end caps and silicone jacket) |



ADH406

High-Tack Surface Adhesive, Clear, 0.7oz Tube

| | |
|---------------|---------------------|
| Chemical Type | Ethyl cyanoacrylate |
| Application | Sealing or Bonding |
| Weight | 20gr (0.7oz) |

