

MAIN POWER SUPPLY **BL LED Driver** Input 24VDC **DECODER SPI** R SP UNI 100 - 277VAC **BL LIGHTING** FIXTURE *DMX Cable OUT To next Decoder *DMX Cable IN From Master DMX Controller

BL LIGHTING WIRING

*All devices in a DMX512 system must be connected in a "daisy chain" fashion.

BL LIGHTING
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8 P: 1-604-874-4405 E: info@bllighting.com Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved. Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.

For more information, please download the BL LIGHTING catalog




(From Previous Decoder)

III - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8 P: 1-604-874-4405 E: info@bllighting.com Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved. Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

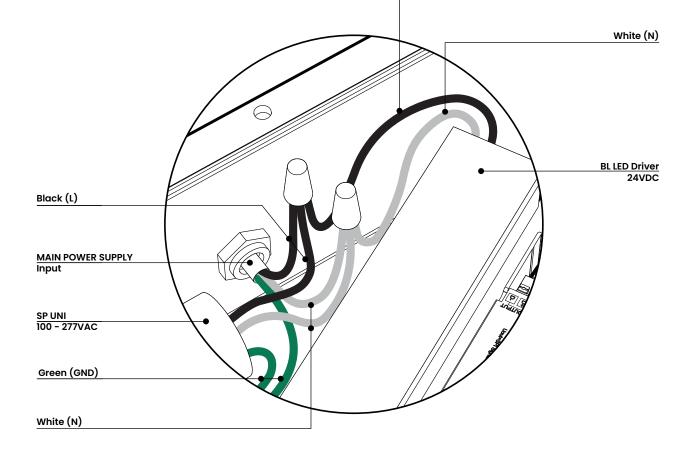



Black (L)



BL LED Driver 24VDC Red (+) Blue (-) BL LIGHTING FIXTURE

BL LIGHTING WIRING

Red (+) SPI SIGNAL

BL LIGHTING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8 P: 1-604-874-4405 E: info@bllighting.com Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved. Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.

For more information, please download the BL LIGHTING catalog



Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

SollED,

M WE CHAN

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8 P: 1-604-874-4405 E: info@bllighting.com Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against prema-ture failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

*DMX Cable IN

DNX IN PUT

From Master DMX Controller (From Previous Decoder)

Black (D-)

Red (D+)

Bar (GND)

4





PIXEL

(Hardwire)