BL controls CATO touch screen + App

DMX512 Master Controller
Programmable

BL LIGHTING
SINCE 1986

The BL controls CATO touch screen + App. is a wall-mounted DMX controller designed for the most demanding projects, featuring 1024 channels, 2 universes, 500 scenes and 10 zones. The glass panel interface features an intuitive and user-friendly, touch-sensitive color display, allowing simple selection of up to 50 scenes, along with speed, dimming, saturation and RGBW color control. Connect to a computer or smart device to create your own programs or for remote control.

| Touchscreen Panel | Programmable on Windows/Mac | Smart Phone App |

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail

IP20 | LOW | DMX | ETL c/us

Electrical	Input Voltage	6VDC, 0.6A (Plug-in power supply included)
	Connections	1Mini-USB 2.0 RS232 Ethernet 8 Dry Contact Points 5V Output Relay
Mechanical	Housing Construction	Glass Touch Panel Black Frame
	Mounting	Single or Double Gang Wall Socket
	Weight	0.54lb (247g)
Environmental	Environmental	IP20
	Certifications	ETL
	Operating Temperature	14ºF to 113ºF (-10ºC to 45ºC)

Features

- DMX 512 Protocol
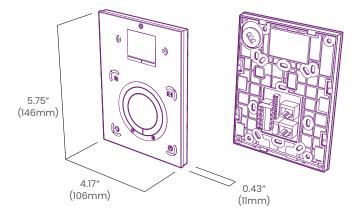- 2 Universes
- Intuitive Control Palette
- LCD Screen
- Clock & Calendar Trigger
- Mac OSX and Windows
- Smart Phone App

Ordering

Product Code
BL-controls-CT-DMX-1024-6V-IP20

Dimensions

5.75" (146mm)
4.17" (106mm)
0.43" (11mm)

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please downlad the BL LIGHTING catalog

bllighting.com