

BL controls

DMX512 Master Controller
Programmable

PHAROS

VLC

Printed



Certification



Electrical

Input Voltage	100-240 VAC, 0.2 - 0.4 A, 50-60 Hz, 50W maximum
Operating Temperature	0°C to 50°C (32°F to 122°F)

Mechanical

Housing Construction	Metal enclosure
Mounting	19" rack mount
Weight	3.1 kg (6.8 lbs)
Environmental	IP40

Features

- DMX 512 Protocol
- Up to 50 universes (25600 channels) of control
- Output signal in sACN, Art-Net and KINET
- Synchronises with up to 40 Pharos controllers over network
- Time and date based triggers
- Lua scripting capability
- Control through a web application

Connections

Ethernet (RJ45)
DVI-D
RS232 via DB9 connector
USB

PROJECT <input type="text"/>	CLIENT <input type="text"/>	TYPE <input type="text"/>
------------------------------	-----------------------------	---------------------------

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com



BL controls


DMX512 Master Controller
Programmable

PHAROS

VLC

Printed

Dimensions

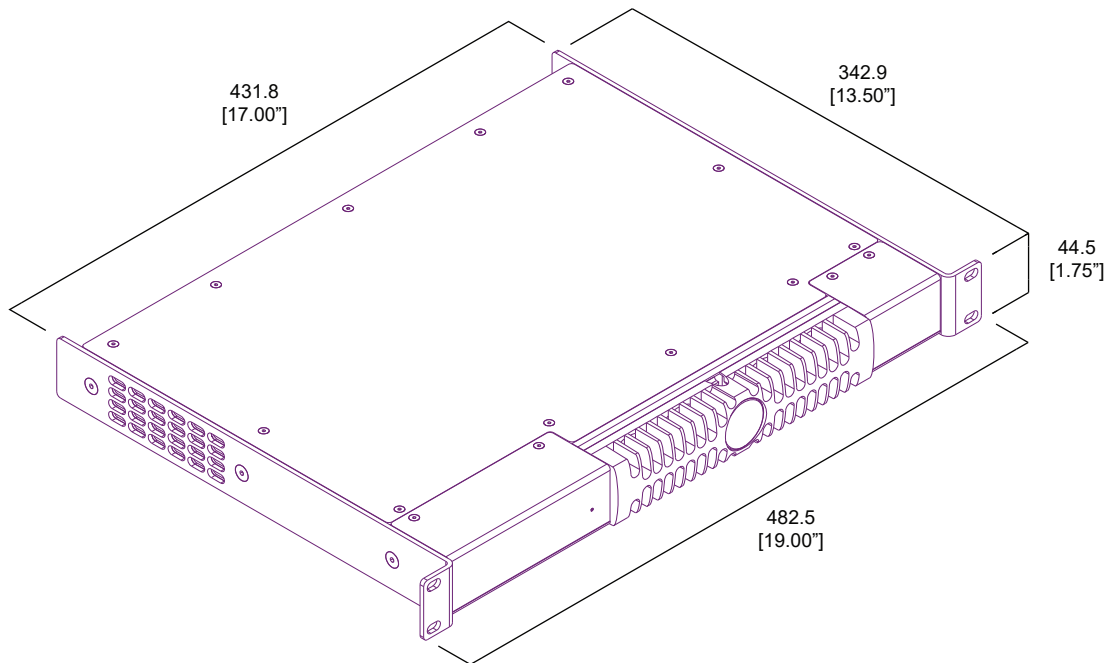

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

