


BL controls

DMX512 Touch Screen Interface

TPS

Printed

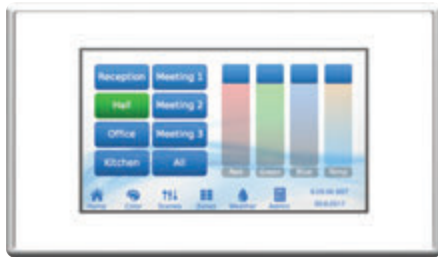

Certification



Electrical

Input Voltage	44 VDC, 4W typical
Operating Temperature	0°C to 50°C (32°F to 122°F)

Mechanical

Housing Construction	Metal enclosure, glass touch screen
Mounting	Flush or surface wall box
Weight	0.25kg (0.55 lbs)
Environmental	IP40

Features

- Touch interface for control of other Pharos products
- Synchronises with up to 40 Pharos controllers over network
- Fully customizable user interface
- Keypad for PIN-code entry with multiple user levels

Connections

Power over Ethernet (RJ45)

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com




BL controls

DMX512 Touch Screen Interface

TPS

Printed

Dimensions

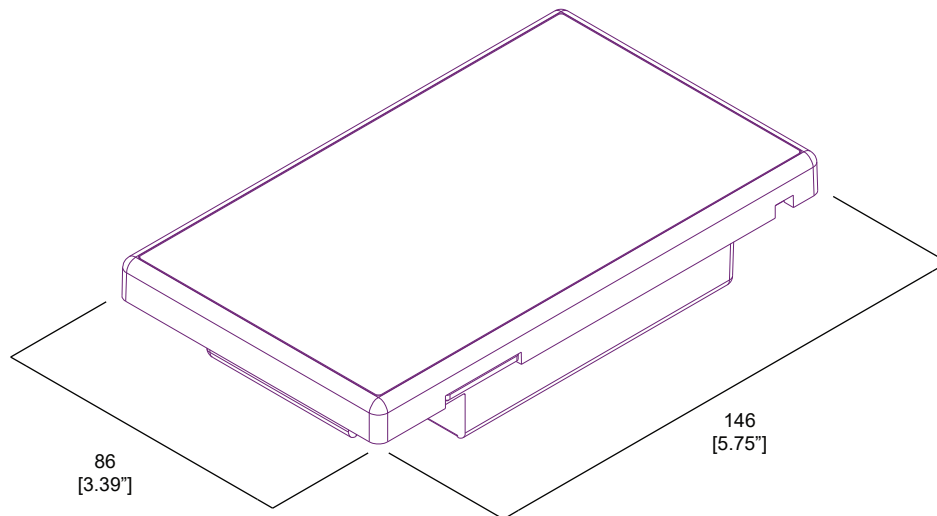

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

bllighting.com

