BL fixFORM SF Wide 4930

Indoor Surface Mount Aluminium Extrusion
Designed for use with **BL flexFORM** Series

BL LIGHTING
SINCE 1986

BL fixFORM SF Wide 4930 surface mount channel has a wide 1.96" (50mm) flat profile optic, allowing for creation of virtually infinite lines of cohesive light, in a variety of lumen packages. The standard 6ft lengths are field cuttable, and easy to install with included surface mounting clips.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail


IP20

cULus LISTED
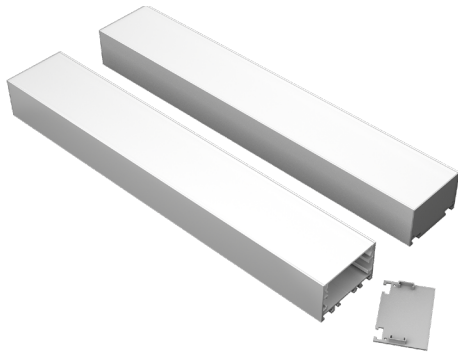
|		
Mechanical	Housing Construction	Aluminium Enclosure Polycarbonate Optic (75% Trans.) Plastic End Caps Stainless Steel Screws
	Stock Length	6ft (1.83m)
	Minimum Cut Length	Based on BL flexFORM Increments
Components	BL-fixFORM-SF-WD-4930-CH	Aluminium Base Track
	BL-fixFORM-SF-WD-4930-LE	Polycarbonate Optic
	BL-fixFORM-SF-WD-4930-EC	Plastic End Caps with Stainless Steel Screws
	BL-fixFORM-SF-WD-4930-CP	Steel Surface Mounting Clips
	BL-fixFORM-TC180	Multi-Track Connector, Flat 180°
	BL-fixFORM-TCX90	Multi-Track Connector, In/Out 90°
	BL-fixFORM-TCF90	Multi-Track Connector, Flat 90°
Environmental	Ingress Protection	IP20
	Certifications	cULus

Connector Options

TC180
Multi-Track Connector, Flat 180°

TCX90
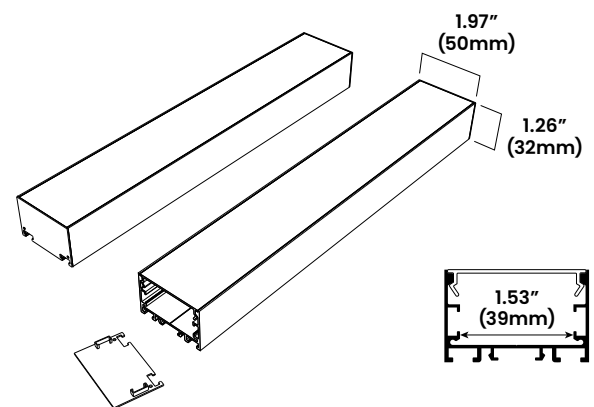Multi-Track Connector, In/Out 90°

TCF90
Multi-Track Connector, Flat 90°

Ordering

Product Code
BL-fixFORM-SF-WD-4930-FR-IP20

Custom channel colors are available, please consult BL Lighting for more information.

Dimensions

1.97"
(50mm)

1.26"
(32mm)

1.53"
(39mm)

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please downlad the BL LIGHTING catalog

bllighting.com