


BL flexFORM Accessories

Flexible, Linear LED Strip Lighting
Accessories

ACC


Printed

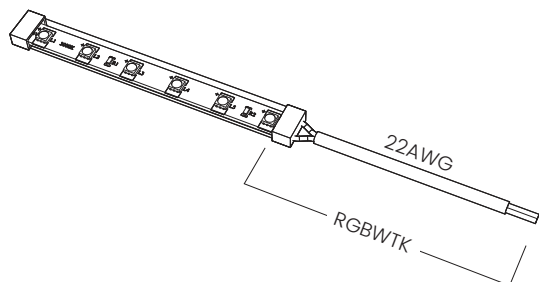

RGBWTK20, RGBWTK65

Termination Kit for BL flexFORM RGBW Series, Connector w/ 5FT Leads


Housing Construction	Silicone Jacket (IP65 only)
Connections	22AWG, Copper Conductors
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
Circuit	Class 2
Length	5'
Environmental	IP20 or IP65 (w/ end caps and silicone jacket)

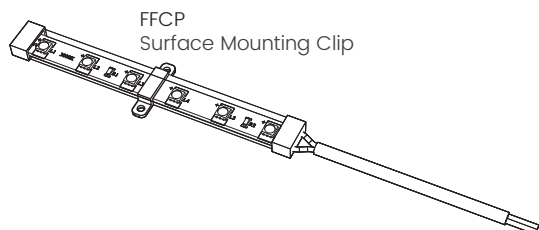

FFCP

Surface Mounting Clip for BL flexFORM Series

Housing Construction	Silicone
----------------------	----------

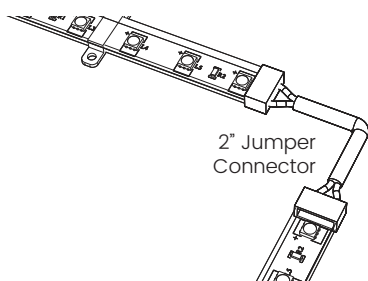

RGBWJC20, RGBWJC65

2" Jumper Connector for BL flexFORM D Series

Housing Construction	Silicone Jacket (IP65 only)
Connections	22AWG, Copper Conductors
Operating Temperature	-20°C to 40°C (-4°F to 104°F)
Circuit	Class 2
Length	2" (or Custom)
Environmental	IP20 or IP65 (w/ end caps and silicone jacket)



ADH406

High-Tack Surface Adhesive, Clear, 0.7oz Tube

Chemical Type	Ethyl cyanoacrylate
Application	Sealing or Bonding
Weight	20gr (0.7oz)

PROJECT

CLIENT

TYPE

Solid State Lighting is sensitive to power fluctuations
Surge protection is highly recommended for all LED lighting products and should be on a designated circuit to protect against premature failure
Lack of surge protection may void your warranty

For more information, please download the
BL LIGHTING catalogue

BL LIGHTING. ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 F: 1-604-321-0445 E: info@blighting.com
Copyright © 2017 BL INNOVATIVE LIGHTING. All Rights Reserved.

blighting.com

