

BL inGROUND DISC 070

Circular, Outdoor Recessed Luminaire
2.5W, 24VDC Constant Voltage



BL inGROUND DISK 070 Drive over compact LED grazer directs light to the side and casts a glare free glow across surfaces, bathing walkways and paths in smooth illumination with your choice of uni, bi, or quad directional beams. The incredibly low profile and efficient 2.5W LED luminaire is IP67 rated and durably constructed with a die-cast aluminum body, Ø2-3/4"(70mm) chrome plated 316 stainless steel trim, optic lens, and IK10 rating for walk and drive over applications. Easy to install with included mounting boot, this attractive edge-lit semi-recessed in-grade luminaire enhances walkways and provides safe wayfinding and delineation for paths, plazas, and driveways.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

-4°F to 104°F (-20°C to 40°C) | A Glare Free Glow | Drive-Over

Product Detail



Lighting	Lamp	SMD3030 LED
	Beam Angle	120°
	Average Life	50,000 Hours
Electrical	Controls	0-10V, MLV, ELV, Phase-Cut, Triac, DMX, Bluetooth
	Input Voltage	24VDC
	Connections	16AWG, Copper Conductors
	Power Cable Length	20" (50cm)
	Housing Construction	Powder coated aluminum
Mechanical	Front Cover	316 stainless steel
	Diameter Front Cover	2.76" (70 mm)
	Gasket	Silicone seal
	Mounting Sleeve	ABS Plastic
	Weight	Sleeve = 0.22 lb (0.1kg), Luminaire = 0.88 lb (0.4kg)
	Weight Bearing	4409lbs (2000 kg)
	Lens	Optic Lens
Environmental	Operating Temperature	-4°F to 104°F (-20°C to 40°C)
	Ingress Protection	IP67
	Impact Protection Rating	IK10
	Certifications	ETL


Performance

CCT/Color		2000K	3000K	4000K	6000k
Power	W/Unit	2.7			
Lumens	lm/Unit (lm/m)	6			
Efficacy	lm/W	2.2			
CRI	CRI	73			

Ordering

Product Code	CCT	Finish
BL inGROUND DISK 070		
	2000K	1S = 1 slot
	3000K	2S = 2 slot
	4000K	4S = 4 slot
	6000K	

Dimensions

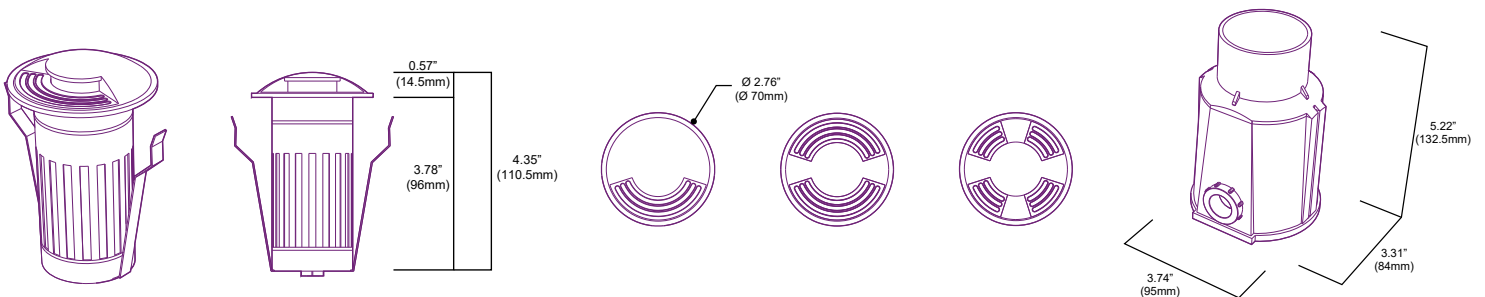

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

