

BL inGROUND DISK114

Circular, Outdoor Recessed Luminaire
24VDC Constant Voltage



BL inGROUND DISK114 ground recessed uplights are built to blend seamlessly into the landscape, and ideal for vertical highlighting of features such as columns, porticoes, garden walls, and tree silhouettes. Available with your choice of 30°, 45° or 120° beam angles, in 3000K, 6000K or RGB options. The unit is durably constructed with a die-cast aluminum body, a 316 stainless steel trim and a tempered glass lens while the mounting boot allows uniform and fast installations. Low profile and efficient, these well lights are rated IP67, and are treadable, with a 2000lb weight bearing capacity, perfect for installation in pavers, on decks, patios and along paths and walkways.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

2000LB Weight Bearing **24VDC**

Product Detail



Lighting	Lamp	CREE LED, 2W (x3)
	Average Life	35,000 Hours
Electrical	Controls	DMX, Bluetooth (RGB only)
	Input Voltage	24VDC
	Frequency	50/60Hz
	Connections	18AWG Copper Conductors
Mechanical	Housing Construction	Die-Cast Aluminum Body 316 Stainless Steel Trim Tempered Glass Lens PVC Mounting Boot
	Weight Bearing	2000LB (907kg)
	Power Cable Length	1.6' (0.5m)
Environmental	Ingress Protection	IP67
	Certifications	ETL
	Operating Temperature	-4°F to 104°F (-20°C to 40°C)


Performance

CCT/Color		3000K	6000K	RGB
Power	W/unit	5.5	5.5	6.5
Lumens	lm/unit	376	376	205
Efficacy	lm/W	68	68	32

Ordering

Product Code	CCT/Color	Beam Angle
BL inGROUND DISK114		
	3000K	30D (30°)
	6000K	45D (45°)
	RGB	120D (120°)

Dimensions

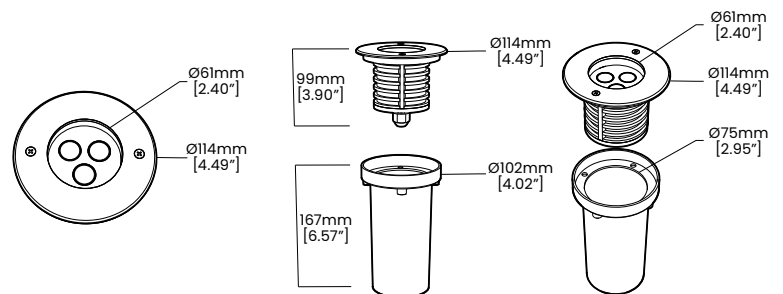

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-604-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

blighting.com

