

BL neonVIEW TUNABLE FLAT SI

Diffused, Flexible, Linear LED Lighting,
24VDC, Constant Voltage
Flat Profile, Silicone, Tunable White



BL neonVIEW TUNABLE FLAT SI has a standard fully flexible Silicone encapsulated diffuser and is rated for a range of operating temperatures from -40° F to 131° F (-40° C to 55° C) for sustained ability to weather the elements, even in the most extreme environmental conditions. Set the mood with BL neonVIEW TUNABLE FLAT SI, delivering adjustable luminous white light with control options to easily change LED intensity, dim to warm, and tune in to any CCT.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Dot-free | **Seamless connections** | **-40°F to 131°F (-40°C to 55°C)** | **Tunable White**

Product Detail



Lighting	Lamp	LED, SMD 3015
	LED's Per Foot	44 LEDs/ft (144 LEDs/m)
	Beam Angle	120°
	Average Life	50,000 Hours
Electrical	Controls	DMX, Bluetooth
	Input Voltage	24VDC
	Max Input Current	4.12A (White)
	Connections	18AWG, Copper Conductors
	Power Cable Length	Standard 10ft (3m). Also available in 16ft (5m) and 32ft (10m)
Mechanical	Circuit	Class 2
	Housing Construction	Injection Moulded White Silicone
	Minimum Bend Radius	2.25" (60mm)
	Operating Temperature	-40°F to 131°F (-40°C to 55°C)
Environmental	Ingress Protection	IP68
	Impact Protection	IK10
	Vibration Rating	-
	Resistance	UV, Flame, Solvents and Saltwater Resistant
Certifications		cULus, CE, RoHS Compliant



Performance

CCT/Color		2200K	5700K	2200K + 5700K
Power	W/FT (W/m)	3.66 (12)		
Lumens	lm/FT (lm/m)	43 (140)	52 (170)	95 (312)
Efficacy	lm/W	12	14	26
CRI	CRI	80		
Increment	inch (mm)	3.28 (83.3)		
Max. Length	ft (m)	24ft 6in (7.5m)		

Ordering

Product Code	CCT	Lead Orientation	Mounting Accessories*																		
BL neonVIEW TW FT SI	2200K-5700K	<table border="1"> <tr> <td>NVS FT BC 68</td> <td>= Back Lead</td> </tr> <tr> <td>NVS FT EC 68</td> <td>= End Lead</td> </tr> <tr> <td>NVS FT RC 68</td> <td>= Right Side Lead</td> </tr> <tr> <td>NVS FT LC 68</td> <td>= Left Side Lead</td> </tr> </table>	NVS FT BC 68	= Back Lead	NVS FT EC 68	= End Lead	NVS FT RC 68	= Right Side Lead	NVS FT LC 68	= Left Side Lead	<table border="1"> <tr> <td>NV CPS</td> <td>= Mounting Clip</td> </tr> <tr> <td>NV CHS</td> <td>= Mounting Channel</td> </tr> <tr> <td>NV RCPS</td> <td>= Recessed Mounting Clip</td> </tr> <tr> <td>NV RCHS</td> <td>= Recessed Mounting Channel</td> </tr> <tr> <td>NV FCHS AL</td> <td>= Flexible Mounting Channel</td> </tr> </table>	NV CPS	= Mounting Clip	NV CHS	= Mounting Channel	NV RCPS	= Recessed Mounting Clip	NV RCHS	= Recessed Mounting Channel	NV FCHS AL	= Flexible Mounting Channel
NVS FT BC 68	= Back Lead																				
NVS FT EC 68	= End Lead																				
NVS FT RC 68	= Right Side Lead																				
NVS FT LC 68	= Left Side Lead																				
NV CPS	= Mounting Clip																				
NV CHS	= Mounting Channel																				
NV RCPS	= Recessed Mounting Clip																				
NV RCHS	= Recessed Mounting Channel																				
NV FCHS AL	= Flexible Mounting Channel																				

* Stainless steel and composite mounting options are also available.

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.


Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com



Minimum Bend Radius and Bend Orientation

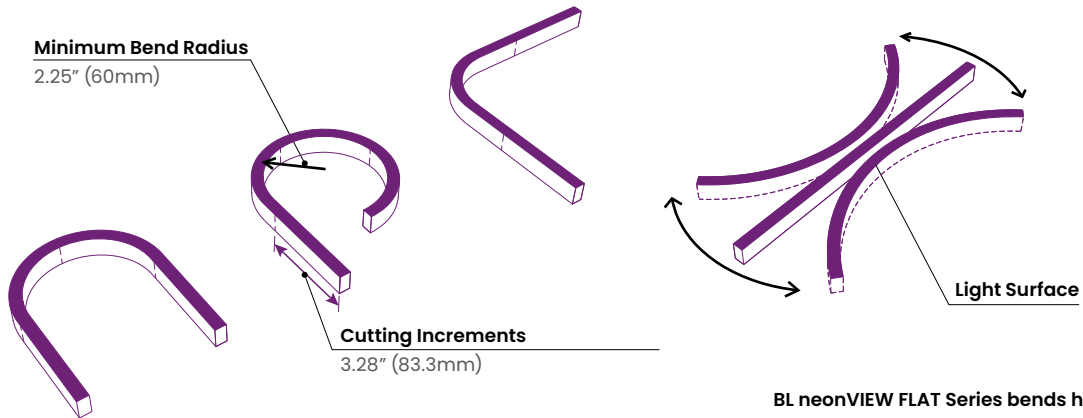


BL neonVIEW FLAT Series bends horizontally

Vertical bend option available on BL neonVIEW SIDE Series

Dimensions & Lead Orientations


Back Lead

NVS FT BC 68

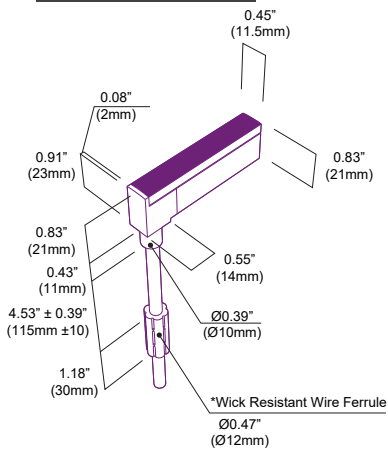


End Lead

NVS FT EC 68

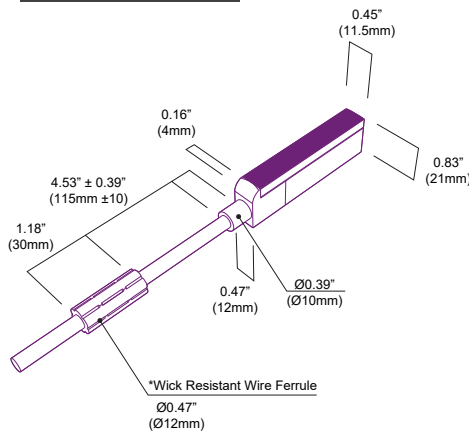


End Cap




Right Side Lead

NVS FT RC 68

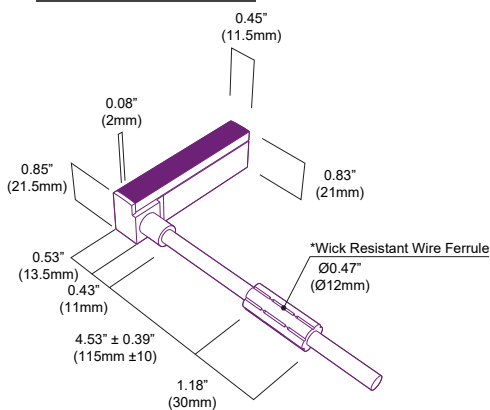

Left Side Lead



NVS FT LC 68

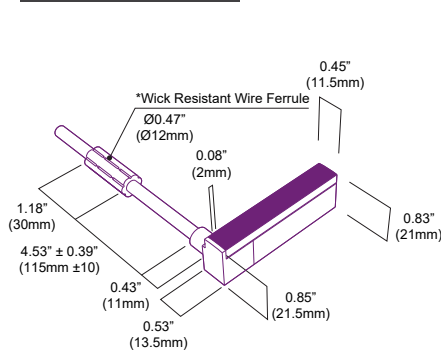

*The Wick Resistant Wire Ferrule is built into the lead wire, 4.5" (115mm) from the BL neonVIEW Termination Connection, for additional moisture ingress protection. Removal of the Wick Resistant Wire Ferrule may void your warranty.



Beam Angle

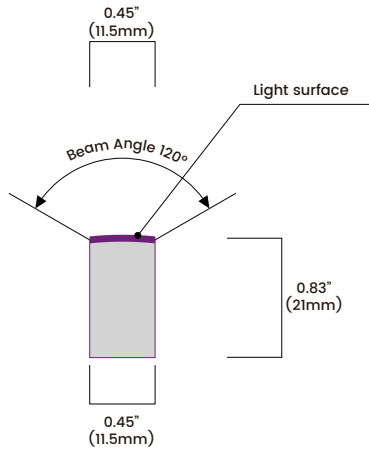

Unit: cd
— C90/270

Average Beam Angle (50%): 112.2°

