




Please note that these instructions are guidelines only and in no way supersede any construction or installation standards. Local building and electrical codes should be consulted before installation.

ATTENTION

- There is potential danger of electrical shock when operating electrical components.
- Make sure power is turned off before installation.
- Allow for heat dissipation and adequate ventilation.

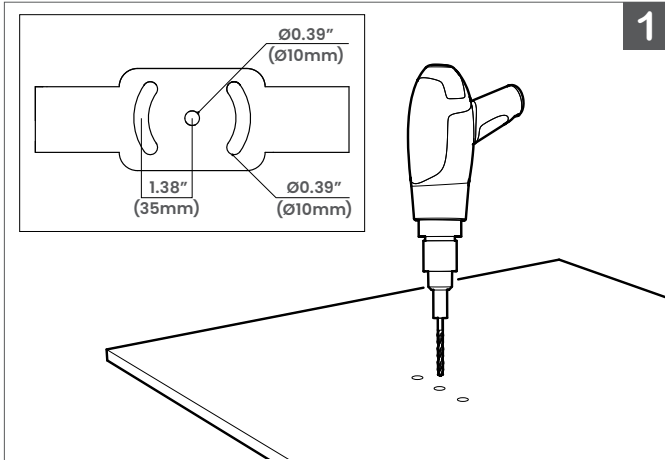

1

1.


A. Align the bracket on the surface and mark the holes spaced 1.38" (35mm) apart.

B. Drill Ø0.39" (10mm) holes at the marked points.

NOTE: Anchoring methods must be selected based on the installation surface.

- For concrete surfaces: Use expansion bolts.
- For thin or hollow materials: Use through bolts with washers and nuts.
- For soil or grassy areas: A stable base (e.g., concrete footing or ground spike) is required to ensure secure mounting.


Always ensure fasteners are rated for the site conditions.

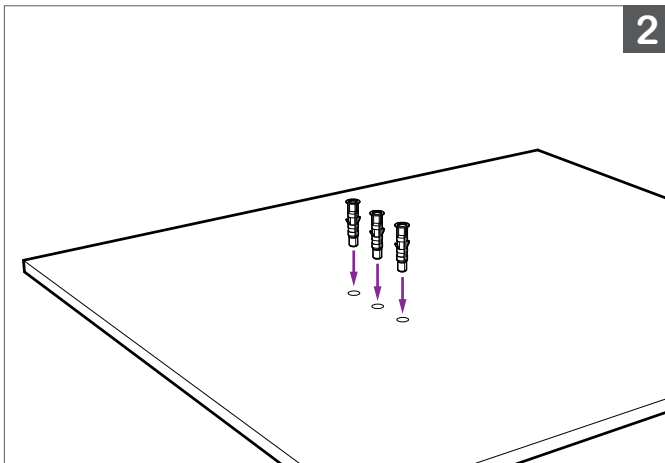

2

2.

Push the anchors into the drilled holes until they are flush with the surface.

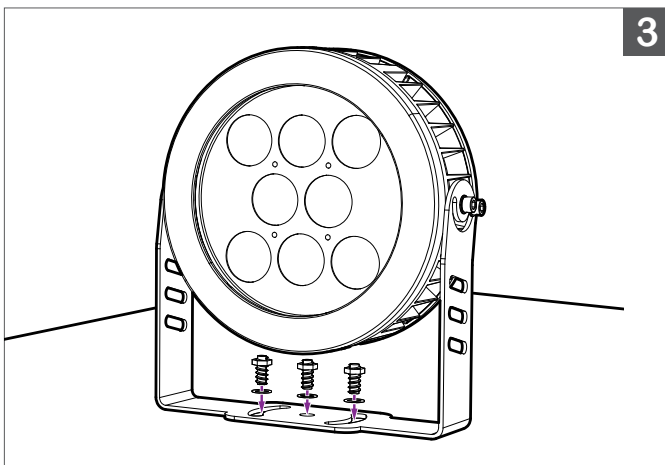

3

3.

Align the fixture with the anchors and secure it using screws through the mounting holes. Tighten firmly.



4

4.

Slightly loosen the screws on both sides of the fixture using a hex key.

5

5.

Tilt the fixture to the desired angle.

6

6.

Retighten the side screws with the hex key to secure the fixture in place.

