


The **CR5** delivers smooth, uniform illumination for architectural and landscape lighting. Producing up to 3715 lumens with 8°, 20°, and 50° beam angles, it offers versatile lighting effects for walls and facades. Built with durable 6063 aluminum alloy housing and rated IP66, the **CR5** performs reliably in harsh conditions. Compatible with 0-10V controls, it operates on 120-277VAC and meets ETL, CE, and RoHS standards for safe, efficient lighting performance.

<b>CLIENT</b>	
<b>PROJECT NAME</b>	
<b>LOCATION</b>	
<b>DATE</b>	

Up to 3723 lm/unit    120-277VAC

**Product Detail**

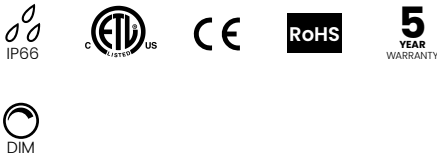

<b>Lighting</b>	Power	36W	
	Beam Angle	8°, 20°, 50°	
	Average Life	50,000 Hours	
<b>Electrical</b>	Controls	0-10V, DALI	
	Input Voltage	120-277VAC	
	Input Freq.	50/60Hz	
	Control	0-10V	DALI
	Max. Series (Units)	100	64
	Power	120V	240V
	Max. Series (Units)	30	55
<b>Mechanical</b>	Housing Construction	6063 Aluminum Alloy	
	Mounting	Wall / Floor	
	Dimensions (mm)	W:8.35" x D:3.94" x H:9.95" (W:212 x D:100 x H:252.7)	
<b>Environmental</b>	Operating Temperature	-4°F to 122°F (-20°C to 50°C)	
	Ingress Protection	IP66	
	Certifications	ETL, CE, RoHS Compliant	

**Performance**

CCT/Color		2700K	3000K	4000K	5000K	6500K
<b>Power</b>	W/unit	36				
<b>Lumens</b>	lm/unit	3698	3715	3720	3722	3723
<b>Efficacy</b>	lm/W	103	103	103	103	103

**Ordering**

Product Code	Series	CCT/Color	Beam Angle	Control	Finish	IP Rating
CR5	L					IP66
		2700K	8°	NO	BK = Black	
		3000K	20°	0-10V	DG = Dark Gray	
		4000K	50°	DALI	GR = Gray	
		5000K			WH = White	
		6500K				



Dimensions

