

Cbox J5 DALI 60W

BL Power

Fully Assembled Power Box
Single Circuit, 60W, 24VDC, CV, DALI Dimming



The Cbox are completely integrated, highly-customizable, fully cULus Listed Class 2 power and control boxes rated for Dry and Wet Locations. All Cbox enclosures arrive to site assembled and ready for quick wiring and install. All required components included. The Cbox J5 DALI features DALI-2 dimming LED drivers.

Quick Ship

Wet Location

| | |
|--------------|--|
| CLIENT | |
| PROJECT NAME | |
| LOCATION | |
| DATE | |

Product Detail




| | | |
|-------------------|-----------------------|------------------------------------|
| Electrical | Input Voltage | 100-277VAC |
| | Input Frequency | 47-63 Hz |
| | Max Input Current | 0.9A |
| | Output Voltage | 24VDC, Constant Voltage |
| | Power | 60W |
| | Min. Power Draw | 1W |
| | Dimming | DALI |
| | Number of Channels | 1 |
| | Min. Dimming Level | 0% |
| | Max. Output Current | 2.5A |
| | Connections | 18 AWG, Copper Conductors |
| | Power Factor | 0.95 - 0.99 |
| | Protection | Cat. C3 Surge Location (10kA/10kV) |
| Mechanical | Surge Current Rating | 20,000A, 8/20 µSec Wave |
| | Rating (2mS) | 540 Joules |
| | Max. Clamping Voltage | 925V |
| | Ambient Temperature | -40°F to 124°F (-40°C to 51°C) |
| | Max. Case Temperature | 140°F (60°C) |
| | Circuit | Class 2 |
| | Housing Construction | PVC (enclosure) |
| Weight | 7.5lbs (3.40kg) | |
| Environmental | IP66 | |

Ordering

| Product Code | Series | Power | Channels | Output | Input Voltage | IP Rating |
|--------------|--------|-------|----------|--------|---------------|-----------|
| CBJ5DA | P | 60W | 1C | 24 | UNI | IP66 |

Dimensions

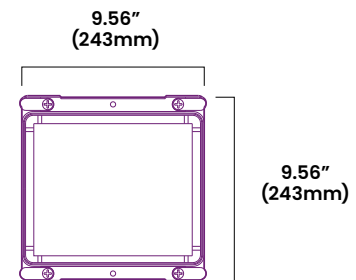

BL LIGHTING
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

