

Cbox J5 DALI 96W 2C

BL Power

Fully Assembled Power Box
Single Circuit, 96W, 24VDC, CV, DALI Dimming




The Cbox are completely integrated, highly-customizable, fully cULus Listed Class 2 power and control boxes rated for Dry and Wet Locations. All Cbox enclosures arrive to site assembled and ready for quick wiring and install. All required components included. The Cbox J5 DALI features DALI-2 dimming LED drivers.

Quick Ship

Wet Location

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail




Electrical	Input Voltage	100-277VAC
	Input Frequency	47-63 Hz
	Max Input Current	1.5A
	Output Voltage	24VDC, Constant Voltage
	Power	96W
	Min. Power Draw	1W
	Dimming	DALI
	Number of Channels	2
	Min. Dimming Level	0%
	Max. Output Current	4A
	Connections	18 AWG, Copper Conductors
	Power Factor	0.95 - 0.99
	Protection	Cat. C3 Surge Location (10kA/10kV)
Mechanical	Surge Current Rating	20,000A, 8/20 µSec Wave
	Rating (2mS)	540 Joules
	Max. Clamping Voltage	925V
	Ambient Temperature	-40°F to 124°F (-40°C to 51°C)
	Max. Case Temperature	140°F (60°C)
	Circuit	Class 2
	Housing Construction	PVC (enclosure)
Weight	7.8lbs (3.53kg)	
Environmental	IP66	

Ordering

Product Code	Series	Power	Channels	Output	Input Voltage	IP Rating
CBJ5DA	P	96W	2C	24	UNI	IP66

Dimensions

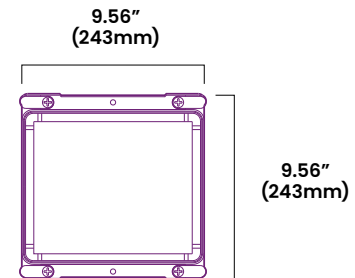

BL LIGHTING
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

