

# Flat Select Pixel

BL Select Neon

Diffused, Flexible, Linear LED Lighting,  
24VDC, Constant Voltage  
Flat Profile, Silicone, Color Changing



**Flat Select Pixel** features a fully flexible silicone-encapsulated diffuser with 17LEDs/ft on a 24V constant-voltage system, rated for -40°F to 131°F (-40°C to 55°C) for reliable performance in any environment. Pixel-addressable and horizontally flexible, it allows precise control for expressive motion, chasing, and dynamic lighting effects. IP68 waterproof and cuttable for custom layouts, **Flat Select Pixel** is ideal for retail accents, interior decorative lines, facade lighting, and dynamic signage, delivering professional, customizable lighting solutions for horizontal applications.

Dot-free Seamless connections -40°F to 131°F (-40°C to 55°C) Color Changing

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

## Product Detail



Lighting	Lamp	LED, SMD 5050
	LED's Per Foot	17 LEDs/ft (56 LEDs/m)
	Beam Angle	120°
	Average Life	50,000 Hours
Electrical	Controls	DMX
	Input Voltage	24VDC
	Max Input Current	4.12A
	Connections	3x20AWG Wires
	Power Cable Length	Standard 10ft (3m). Also available in 16ft (5m)
	Circuit	Class 2
Mechanical	Housing Construction	Injection Moulded White Silicone
	Mounting	Mounting Clips, Mounting Channels
	Weight	0.27 lb/ft, 0.4 kg/m
	Dimensions	W: 0.45"x H: 0.83" (W: 11.5mm x H: 21mm)
	Minimum Bend Radius	1.57" (40mm)
Environmental	Operating Temperature	-40°F to 131°F (-40°C to 55°C)
	Ingress Protection	IP68
	Impact Protection	IK08
	Resistance	UV, Flame, Solvents, Saltwater and Dirt Resistant
	Certifications	cULus, CE, RoHS Compliant, CB

## Performance

CCT/Color		Red	Green	Blue	RGBW(2700K)	RGBW(3000K)	RGBW(4000K)	RGBW 5000K)
Power	W/FT (W/m)		-					4.57(15)
Lumens	lm/FT (lm/m)	7.93(26)	24.7(81)	4.88(16)				61.6(202)
Efficacy	lm/W		-					13
Increment	inch (mm)		-					4.92(125)
Max. Length	ft (m)		-					21.3ft(6.5m)

## Ordering

Product Code	Series	Color	Input Voltage	IP Rating
FPX	SEN		24	IP68
		RGBW(2700K)		
		RGBW(3000K)		
		RGBW(4000K)		
		RGBW(5000K)		

### Note:

Lengths, Lead Orientations & Mounting Accessories for BL Select Neon must be confirmed at time of order.

### BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-804-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at [bllighting.com](http://bllighting.com) for current technical data.

For more information, please download the BL LIGHTING catalog

[bllighting.com](http://bllighting.com)




# Flat Select Pixel

BL Select Neon

Diffused, Flexible, Linear LED Lighting,  
24VDC, Constant Voltage  
Flat Profile, Silicone, Color Changing




## Minimum Bend Radius and Bend Orientation

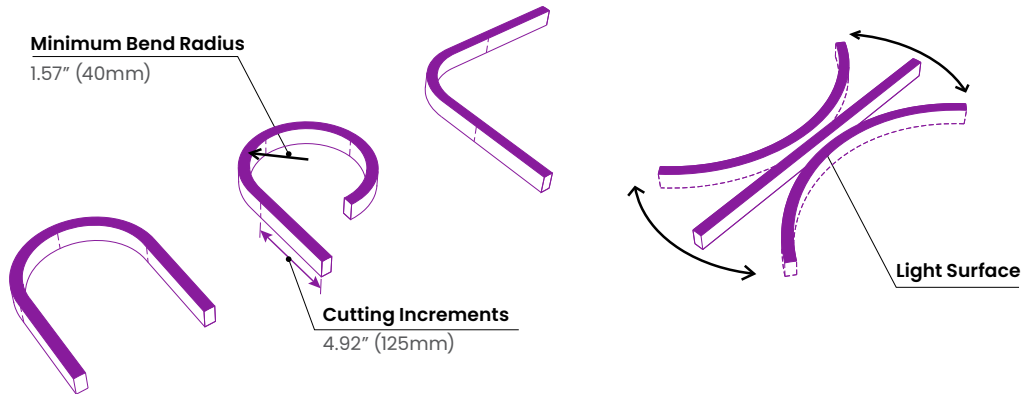

**BL Select Neon Flat Select Series bends horizontally**

Vertical bend option available on BL Select Neon Side Select Series

## Beam Angle

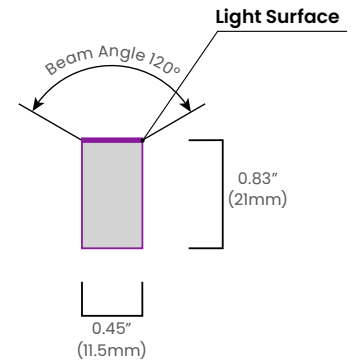


Average Beam Angle (50%), 3000K: 110.5°

## Dimensions & Lead Orientations


### Back Lead

SEN FT BC 68

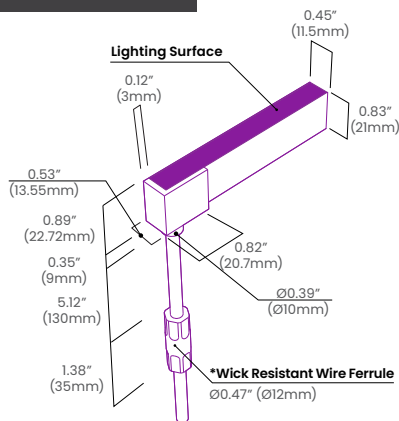


### End Lead

SEN FT EC 68

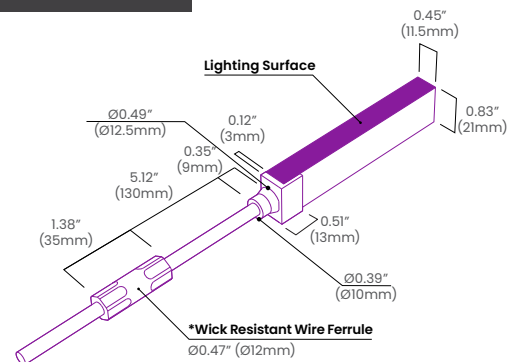


### Right Side Lead

SEN FT RC 68

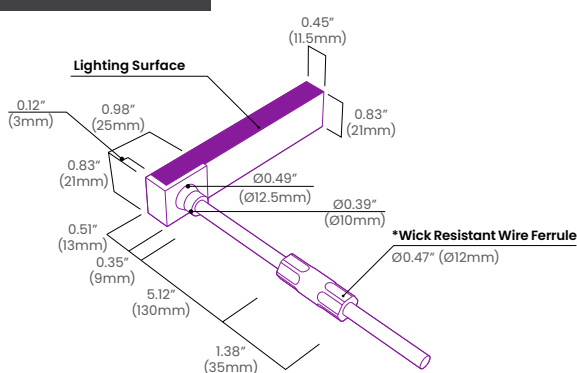

### End Cap

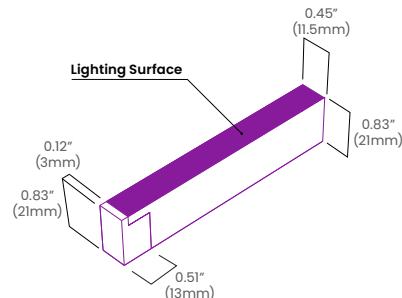

*\*The Wick Resistant Wire Ferrule is built into the lead wire, 5.12\"(130mm) from the BL Select Neon Series Termination Connection, for additional moisture ingress protection. Removal of the Wick Resistant Wire Ferrule may void your warranty.*

## BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-604-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

