

HT 10W

BL Power

Standard LED Driver
10W, Constant Voltage, 24VDC



HT are non-dimmable, quality constructed electronic 24VDC output LED Drivers. Class 2, UL approved, constant voltage, and perfectly compatible with low-voltage, RGBW & Tunable systems.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail




Electrical	Input Voltage	100V - 277VAC	
	Input Frequency	60Hz	
	Max Input Current	100VAC - 0.22A	
	Output Voltage	24VDC, 4.1A, Constant Voltage	
	Load	10W	
	Max Current	0.42A	
	Dimming	Non-dimmable	
	Connections	18AWG, Copper Conductors	
	Min Load	20% - 25%	
	Power Factor	0.9	
Mechanical	Circuit	Class 2	
	Housing Construction	Metal	
	Weight	90g (3.1oz)	
Environmental	Operating Temperature	-22°F to 140°F (-30°C to 60°C)	
	Ingress Protection	IP20	
	Certificate	UL	Ⓛ
Wiring	Input	Black ⊕	White ⊖
	Output	Red	Blue

Ordering

Product Code	Series	Power	Output	Input Voltage	IP Rating
HTST	P	10W	24	UNI	IP20

Dimensions

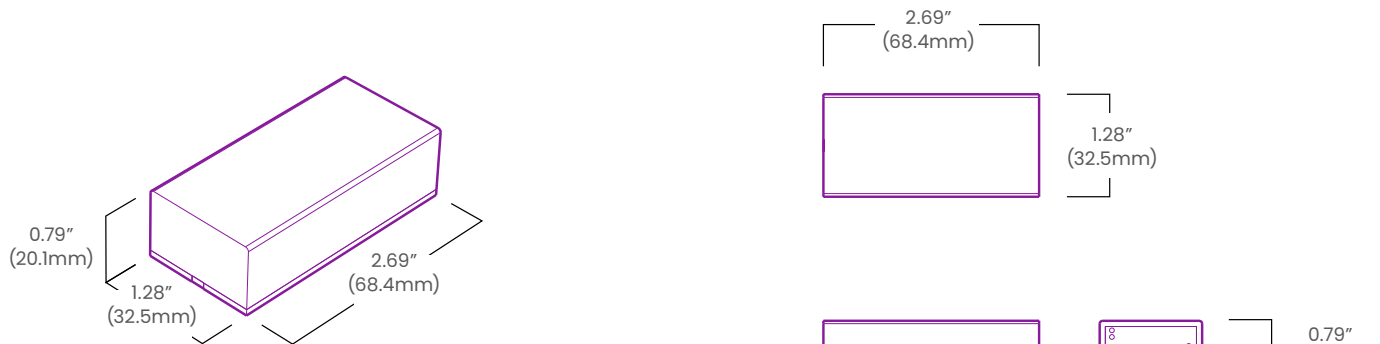

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@billighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at billighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

billighting.com

