

# Halo 195

BL Inwater

Circular, Underwater Recessed Luminaire  
20W, 32W, 12/24VDC Constant Voltage




For fountain applications where 360° spray illumination is desired, Halo 195 creates a brilliant ring of active uplighting. Durably constructed with stainless steel housing and a tempered glass lens, the 2" (50mm) diameter center sleeve opening facilitates easy horizontal mounting, slipping onto a spray nozzle riser like a ring. IP68 rated and designed for permanent submersion up to 16ft (5m) depth, bring your water fountain feature to life with beautiful light.

Up to 1,145 lm/unit

12VDC or 24VDC

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

## Product Detail

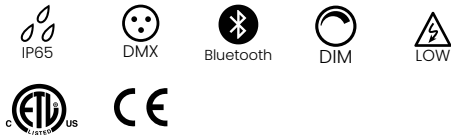

Lighting	Power	20W(Single Color), 32W(RGB)
	Average Life	50,000 Hours
	Controls	0-10V, MLV, DMX, Bluetooth
Electrical	Input Voltage	12VDC - 24VDC
	Connections	18AWG Copper Conductors
	Frequency	50/60Hz
	Housing Construction	Stainless steel housing, Glass
Mechanical	Weight	3.1kg (6.83lb)
	Cord Length	49' (15m)
	Max. Submersion Depth	16'-6" (5m)
	Water Type	Freshwater, Chlorinated water
	Ingress Protection	IP68
Environmental	Certifications	ETL, CE
	Operating Temperature	-13°F to 113°F (-25°C to 45°C)


## Performance

CCT/Color		3000K	4000K	6000K	Red	Green	Blue	RGB
Power	W/unit	20						32
Lumens	lm/unit	890	920	950	300	740	105	1145
Efficacy	lm/W	45	46	48	15	37	5	36

## Ordering

Product Code	Series	CCT/Color	Beam Angle	Input Voltage	IP Rating
LNR3069	G				IP65
		3000K	5°	12	
		4000K	15°	24	
		6000K	25°		
		Red	45°		
		Green	60°		
		Blue			
		RGB			

## Dimensions

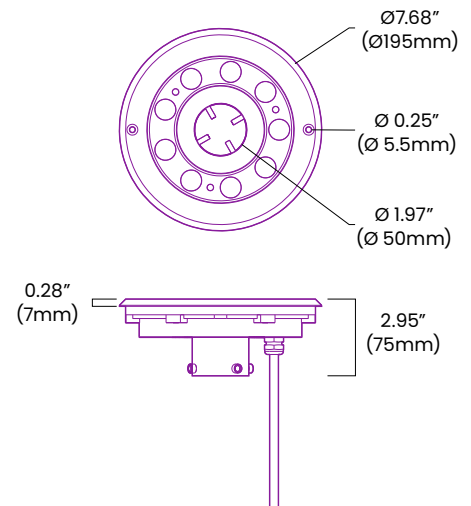

### BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8  
P: 1-804-874-4405 E: info@bllighting.com  
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

bllighting.com

