J5 010V 30W 12V



BL Power

Featuring smooth 0-10V dimming, the J5 010V drivers are UL Listed, Class 2, and have a universal 100-277VAC input voltage. Available in a range of sizes that can power up to 180W over 3x60W output channels, these constant voltage LED Drivers are enclosed in a low profile housing with integrated wiring compartments, making installation easy.


CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail

		Input Voltage	100-277VAC
P65		Input Frequency	47-63 Hz
	1	Max Input Current	0.5A
		Output Voltage	12VDC, Constant Voltage
		Power	30W
		Min. Power Draw	3W
	Electrical	Dimming	0-10V
	Electrical	Min. Dimming Level	0%
		Max. Output Current	1.25A
		Connections	16 AWG, Copper Conductors
		Power Factor	0.95 - 0.99
		Ambient Temperature	-40°F to 140°F (-40°C to 60°C)
		Max. Case Temperature	140°F (60°C)
		Circuit	Class 2
		Housing Construction	Anodized Aluminum
	Mechanical	Weight	2.11b (0.95kg)
		Environmental	IP65

Ordering								
Product Code	Series	Power	Output	Input Voltage	IP Rating			
J510	Р	30W	12	UNI	IP65			

Dimensions

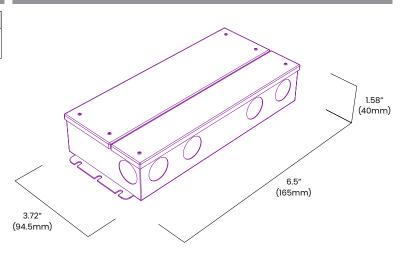

BL LIGHTING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8 P: 1-604-874-4405 E: info@bllighting.com Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved. Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.

bllighting.com

