

Powerful, efficient, and engineered to deliver exceptional wall washing, grazing and architectural highlighting of exterior facades, signage, bridges and monuments. Vertically illuminate buildings with light projection with an impressive output of up to 5390 lumens, in three beam angle options. Durable constructed with aluminum housing, shatter-resistant optical grade PMMA, dual row of high performance color changing LED's, weatherproof line voltage power cables, integral 100-277VAC power supply, and a 180° on board adjustable mounting bracket that allows for precise light distribution. Perfect for dynamic illumination of spatial envelopes in urban settings.

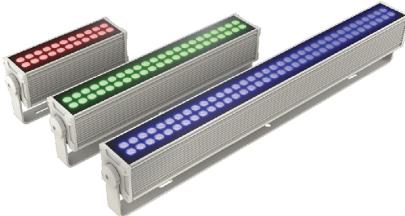
Up to 5390lm/unit

100-277VAC

1FT, 2FT and 3FT Length Options

<b>CLIENT</b>	
<b>PROJECT NAME</b>	
<b>LOCATION</b>	
<b>DATE</b>	

## Product Detail



IP66



DMX



LINE


  
5  
YEAR  
WARRANTY

<b>Lighting</b>	Power	30W (1FT), 60W (2FT), 98W (3FT)
	Average Life	50,000 Hours
	Controls	DMX
<b>Electrical</b>	Input Voltage	100-277VAC
	Connections	16AWG, Copper conductors
	Power Cord Length	1ft (0.3m), extendable
	DMX Cords Length	1ft (0.3m), extendable
	Housing Construction	Aluminum Body, Optical Grade PMMA Lens
<b>Mechanical</b>	Weight	3.6kg/7.93lbs (1FT), 6.5kg/14.33lbs (2FT), 10.3kg/22.70lbs (3FT)
	Mounting	Integrated 180° Adjustable Mounting Bracket
	PCH LN9695	Power Cable 3-Pin (5FT, 15FT, 30FT)
	PCE LN9695	Power Cable Extension 3-Pin (5FT, 15FT, 30FT)
	M3P LN9695	End Cap (3-Pin Cable)
<b>Accessories</b>	DMX 6PH LN9695	Power+Data Cable 6-Pin (5FT, 15FT, 30FT)
	DMX 6PE LN9695	Power+Data Cable Extension 6-Pin (5FT, 15FT, 30FT)
	M6P LN9695	End Cap (6-Pin Cable)
	TJ6 LN9695	T-Joint, 6-Pin to 3-Pin Power and Data
	Ingress Protection	IP66
<b>Environmental</b>	Certifications	ETL
	Operating Temperature	-4°F to 122°F (-20°C to 50°C)

## Ordering

Product Code	Series	Length	Color	Beam Angle	Finish	Input Voltage	IP Rating
LN9695C	L	1FT	RGBW(2700K)	15°	GR = Gray	UNI	IP66
		2FT	RGBW(3000K)	35°	DG = Dark Gray		
		3FT	RGBW(4000K)	15°x40°			
			RGBW(6500K)				



**Performance****Fixture Length: 1.08FT (330mm)**


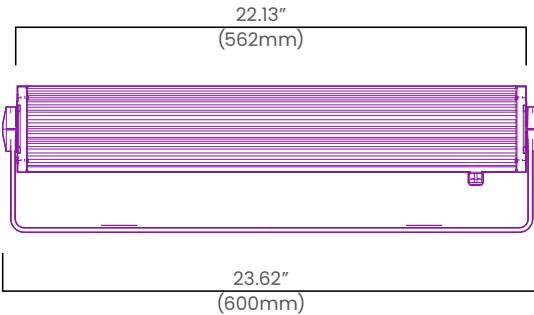
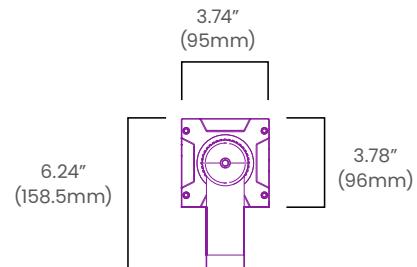
CCT/Color		RGBW(2700K)			RGBW(3000K)			RGBW(4000K)			RGBW(6500K)		
<b>Power</b>	W/unit				30								
<b>Beam Angle</b>		15°	35°	15°x40°	15°	35°	15°x40°	15°	35°	15°x40°	15°	35°	15°x40°
<b>Lumens</b>	lm/unit	1730	1710	1740	1770	1750	1780	1770	1750	1780	1770	1750	1780
<b>Efficacy</b>	lm/unit	58	57	58	59	58	59	59	58	59	59	58	59
<b>CRI</b>					80 (White LED only)								

**Fixture Length: 1.97FT (600mm)**

CCT/Color		RGBW(2700K)			RGBW(3000K)			RGBW(4000K)			RGBW(6500K)		
<b>Power</b>	W/unit				60								
<b>Beam Angle</b>		15°	35°	15°x40°	15°	35°	15°x40°	15°	35°	15°x40°	15°	35°	15°x40°
<b>Lumens</b>	lm/unit	3250	3040	3090	3320	3100	3150	3320	3100	3150	3320	3100	3150
<b>Efficacy</b>	lm/unit	54	51	52	55	52	53	55	52	53	55	52	53
<b>CRI</b>					80 (White LED only)								

**Fixture Length: 3.10FT (945mm)**

CCT/Color		RGBW(2700K)			RGBW(3000K)			RGBW(4000K)			RGBW(6500K)		
<b>Power</b>	W/unit				98								
<b>Beam Angle</b>		15°	35°	15°x40°	15°	35°	15°x40°	15°	35°	15°x40°	15°	35°	15°x40°
<b>Lumens</b>	lm/unit	5290	5000	5100	5390	5100	5200	5390	5100	5200	5390	5100	5200
<b>Efficacy</b>	lm/unit	54	51	52	55	52	53	55	52	53	55	52	53
<b>CRI</b>					80 (White LED only)								

**Dimensions****Fixture Length: 1.08FT (330mm)****Fixture Length: 1.97FT (600mm)****Side view****Fixture Length: 3.10FT (945mm)**