Orion	LED light engine designed for BL Fiberopti 5W, 12VDC	
BL Fibersource		
Orion is an efficient and compact 5W white LED illuminator, e	emitting a bright white light and	

Up to 150 Im Output

CLIENT PROJECT NAME LOCATION DATE

BL

LIGHTING

SINCE 198

nite light and available with your choice of 3000K or 4000K 5W LED. Customize your light output and create special effects with optional Twinkle, Color, or Color + Twinkle Wheel, and easily control dimming, and wheel speed by built in manual switches. Perfect for white light accents and starfield ceiling panels in home theaters, relaxation rooms and spas.

Product Detail

Compact Design


0



Lighting	CCT	3000K, 4000K and 6000K
	Wheel Options	Twinkle, Color
	Average Life	50,000 Hours
Electrical	Controls	Manual Switch
	Input Voltage	100V-240VAC
	PSU Output	12VDC
	Temp. Range	14°F to 113°F (-10°C to 45°C)
Mechanical	Housing Construction	Black ABS
	Environmental	IP20
	Aperture Diameter	1-3/16" (30mm)
	Weight	1.06lb (480g)

Performance

CCT/Color		3000К	4000K	6000K	
Power	W/unit	5W			
Lumens	lm/unit	120	126	150	
Efficacy	lm/W	24	25	30	

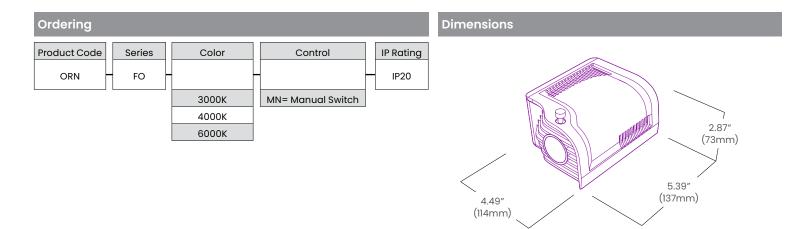

for current technical data.

BL LIGHTING ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8
P: 1-604-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against prema-ture failure. Lack of surge protection may void your warranty. Designed & Assembled in North America.

For more information se downlad the BL LIGHTING catalog

bllighting.com



1