## **P16**

#### **BL Fiberoptic**



 ${f P16}$  is a walkover-rated fiber optic end fixture, recessed applications in architectural and landscape settings. Featuring a 316 stainless steel housing and a flat clear or frosted 0.39" tempered glass lens, it delivers a wide 70° beam with adjustable direction for flexible illumination. Designed for walkover use, P16 supports fiber sizes from 0.08" to 0.31" and withstands loads up to 1,125 lbs. Weighing 2.02 lbs, it's ideal for larger-scale installations requiring durability and control. Rated IP65 and operable from 14°F to 113°F, it offers durable performance indoors or out.

Lighting

Ream Anale

14°F to 113°F (-10°C to 45°C)

Walkover

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

#### **Product Detail**




Lighting	bearn Angle	70
Mechanical	Housing Construction	316 Stainless Steel, Tempered Glass
	Optics	Ø3.14" (Ø80mm) Flat Clear or Frosted Lens
		with adjustable direction
	Weight Bearing	1125lb (510kg)
	Mounting	Recessed
	Min/Max Fiber size	0.08" - 0.31" (2mm - 8mm)
	Weight	2.02lb (917g)
Environmental	Ingress Protection	IP65
	Certifications	Made in USA
	Operating Temperature	14°F to 113°F (-10°C to 45°C)

700

## Ordering

#### Product Code Series Optics P16 PV CL = Clear FR = Frosted

### Dimensions

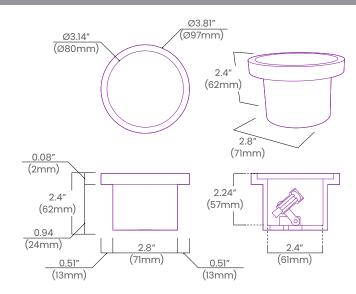

# **BL LIGHTING**

ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC. Canada. V6P 3S8 P: 1-604-874-4405 E: info@bllighting.com Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved. Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data



