## **Pharos Touch Screen**

**BL Contols** 



The BL Controls PHAROS touch screen is an attractive, wall-mounted DMX512 controller, with a capacitive touch panel interface, and customizable lighting controls. This master controller has vast interfacing capabilities and is integratable with up to 40 control devices, allowing for the creation of thousands of DMX universes, and suitable for projects of the grandest scale and complexity.

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

#### Up to 1500 DMX Universes

#### **Product Detail**



Electrical	Input Voltage	44 VDC, 4W typical	
	Housing Construction	Metal enclosure, glass touch screen	
Mechanical	Mounting	Flush or surface wall box	
	Weight	0.25kg (0.55 lbs)	
	Environmental	IP40	
Environmental	Certifications	ETL, CE	
	Operating Temperature	0°C to 50°C (32°F to 122°F)	
Connections	Power over Ethernet (RJ45)		













#### Features

- Touch interface for control of other Pharos products
- Synchronises with up to 40 Pharos controllers over network
- Fully customizable user interface
- Keypad for PIN-code entry with multiple user levels
- Keypad for PIN-code entry with multiple user levels

### Dimensions



### Ordering

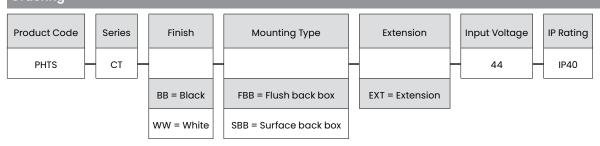

# **BL LIGHTING**

ILLUMINATE EVERYTHING

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.



