

S2215

BL Fixform

Indoor Surface Mount Aluminium Extrusion
Designed for use with **BL Flexform** Series



BL Fixform SF Focus Beam channel has a low profile, dome shaped, clear 30° beam optic, allowing for control of the beam for specific illumination requirements, in a variety of lumen packages. The standard 6ft lengths are field cuttable, and easy to install with included surface mounting clips.

Quick Ship

| | |
|--------------|--|
| CLIENT | |
| PROJECT NAME | |
| LOCATION | |
| DATE | |

Product Detail




| | | |
|----------------------|----------------------|--|
| Mechanical | Housing Construction | Aluminum Enclosure 30° Optic (100% Trans.) Anodized End Caps Stainless Steel Screws |
| | Stock Length | 6ft (1.83m) |
| | Minimum Cut Length | Based on BL Flexform Increments |
| Components | CH-S2215-E | Aluminum Base Track |
| | LE-S2215-E | 30° Polycarbonate Clear Optic |
| | EC-S2215-E | Anodized End Cap with Screws |
| | CP-S2215-E | Steel Surface Mounting Clips |
| | TC180-E | Multi-Track Connector, Flat 180° |
| | TCX90-E | Multi-Track Connector, In/Out 90° |
| Environmental | Ingress Protection | IP20 |
| | Certifications | cULus |




Connector Options


TC180-E
Multi-Track Connector, Flat 180°



TCX90-E
Multi-Track Connector, In/Out 90°




TCF90-E
Multi-Track Connector, Flat 90°



Ordering

| |
|--------------------|
| Product Code |
| S2215-E-AL-FR-IP20 |

Dimensions

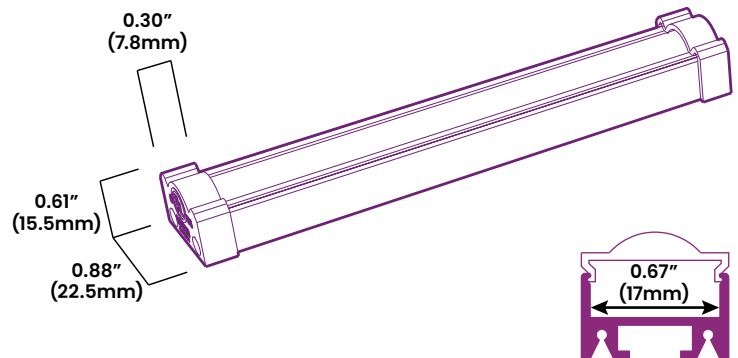

Custom channel colors are available, please consult BL Lighting for more information.

BL LIGHTING
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@blighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at blighting.com for current technical data.

For more information, please download the BL LIGHTING catalog

blighting.com

