

SP6060

BL Fixform

Indoor Suspended Aluminium Extrusion
Designed for use with **BL Flexform** Series




SP6060 channel has a rounded 2.36" (60mm) cylindrical shaped profile optic, allowing you to design your own custom pendant luminaires. Conductive suspension wires combine structural with electrical to seamlessly energize the light, and are adjustable in height. Create linear pendants, custom hanging chandeliers and one-of-a-kind artistic lighting expressions.

Quick Ship

CLIENT	
PROJECT NAME	
LOCATION	
DATE	

Product Detail

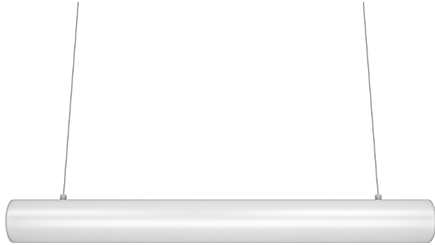


Mechanical	Housing Construction	Aluminum Base Track Polycarbonate Optic (75% Trans.) Zinc Alloy End Caps
	Stock Length	8ft (2.44m)
	Minimum Cut Length	Based on BL Flexform Increments
Components	CH-SP6060-E	Aluminum Base Track
	LE-SP6060-E	Polycarbonate Optic
	EC-SP6060-E	Zinc Alloy End Cap
	WR-SP6060-E	Steel Suspension Wire
	HS-SP6060-E	Anodized Aluminium Hanger
Environmental	Ingress Protection	IP20
	Certifications	cULus

Ordering

Product Code

SP6060-E-AL-FR-IP20

Dimensions



Custom channel colors are available, please consult
BL Lighting for more information.

Size	A	B	C	D	E	F	G
inch	0.45	0.35	2.36	1.18	72	0.55	1.06
mm	11.4	9	60	30	1829	14	27

BL LIGHTING
ILLUMINATE EVERYTHING

111 - 8838 Heather St. Vancouver, BC, Canada. V6P 3S8
P: 1-804-874-4405 E: info@bllighting.com
Copyright © BL INNOVATIVE LIGHTING. All Rights Reserved.

Solid State Lighting is sensitive to power fluctuations. Surge protection is highly recommended for all LED lighting products and should be on a dedicated circuit to protect against premature failure. Lack of surge protection may void your warranty.

Designed & Assembled in North America.

Specifications subject to change without notice. Please refer to our website at bllighting.com for current technical data.

For more information,
please download the
BL LIGHTING catalog

bllighting.com

